

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Саранск (8342)22-96-24
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97

Тверь (4822)63-31-35
Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70


Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

www.norgren.nt-rt.ru | | ner@nt-rt.ru

Технические характеристики на пневмоцилиндры промышленные магнитные двойного действия серии IVAC PRA/862000, PRA/882000 компании **IMI NORGREN**

- > Ø 32 ... 100 mm
- > Cylinders and mountings conform to ISO 15552
- > Complete functional unit with LED display
- > Central electrical connector, polarity-safe
- > Integrated 5/2 or 5/3 valve
- > Additional output ports (2 & 4)
- > Integrated flow regulator for speed control
- > Integrated reed or solid state switches
- > Protection class IP67, suitable for food and beverage sector
- > Energy efficient



Technical features

Medium:

Compressed air, filtered, lubricated or non-lubricated
 Particles size: Class 7, ISO 8573 – 1 (dated 2001)
 Humidity and water content: Air supply must be dry.
 Corresponding of the application and working conditions the air must be dry enough to avoid condensate. The pressure dewpoint must be minimum 15° under the application and working conditions. Oil: Class 4, ISO 8573 – 1 (dated 2001)

Standard:

Based on ISO 15552 (length, mounting pitch and thread dimensions according to ISO 15552. Some outside dimensions different to ISO 15552)

Operation:

Double acting, magnetic piston, adjustable cushioning

Operating pressure:

2 ... 8 bar (29 ... 116 psi)

Port size:

G1/8, G1/4, G3/8

Cylinder diameters:

32, 40, 50, 63, 80, 100 mm

Standard strokes:

See below

Non-standard strokes:

Available (25 ... 1000 mm)

Operating temperature:

-2 ... +70°C max. (+28 ... +158°F)

Supply voltage:

24 V d.c.

Multipole connection:

M12 x 1 male, 8 pin

Power consumption:

1 W max

Rating:

100 % E.D.

Protection class:

IP 67

Life expectation of the cylinder: *1)

Stroke < 100 mm: 10 Mio. Cycles

Stroke > 100 mm: 5000 km

Life expectation of the solenoid valves:

50 Mio. Cycles

*1) Life expectation based on laboratory conditions (more details upon request):

- Operating pressure: 8 bar
- Compressed air: ISO 8573-1, Class 7-4-4
- Ambient temperature: 20° C +/-10° C
- Environment: Industrial plant, no contamination such as dust and/or moisture or similar
- Position: horizontal
- Side load: max. transverse load approx. 1,3% of the theoretical force at 6 bar
- Speed: 1,0 m/s for Ø 32 to 50 mm
0,7 m/s for Ø 63 to 100 mm
- Frequency: < 20 cycles / min (in/out)

Materials:

Profile barrel: anodised aluminium,
 End covers: pressure diecast anodised aluminium
 Piston rod: stainless steel, see page 2
 Piston rod seals: PUR
 Piston seals: PUR
 O-rings: NBR




Technical data

Cylinder Ø (mm)	32	40	50	63	80	100
Port size	G1/8	G1/8	G1/8	G1/4	G1/4	G3/8
Piston rod Ø (mm)	12	16	20	20	25	25
Piston rod thread	M10 x 1,25	M12 x 1,25	M16 x 1,5	M16 x 1,5	M20 x 1,5	M20 x 1,5
Cushion length (mm)	11	14	14	19	19	26
Theoretical thrusts at 6 bar outstroke (N)	482	754	1178	1870	3016	4710
Theoretical thrusts at 6 bar instroke (N)	414	633	990	1680	2722	4416
Air consumption at 6 bar outstroke (l/cm)	0,056	0,088	0,137	0,218	0,35	0,55
Air consumption at 6 bar instroke (l/cm)	0,048	0,074	0,114	0,195	0,32	0,51

Standard strokes

Cylinder Ø (mm)	Stroke length (mm)	25	50	80	100	125	160	200	250	320	400	500
32	•	•	•	•	•	•	•	•	•	•	•	•
40	•	•	•	•	•	•	•	•	•	•	•	•
50	•	•	•	•	•	•	•	•	•	•	•	•
63	•	•	•	•	•	•	•	•	•	•	•	•
80	•	•	•	•	•	•	•	•	•	•	•	•
100	•	•	•	•	•	•	•	•	•	•	•	•

Cylinder variants

Symbol	R	S	C	D	E	V	Model with magnetic piston	Description	Dimensions Page
	•	•	•	•	•	•	PRA/882000/MI	Standard cylinder	7
	•	•	•	•	•	•	PRA/882000/W2	Cylinder with special wiper/seal (suitable for appl. with cement, plaster (stucco), arizona sand, hoar-frost or ice)	7
	•	•	•	•	•	•	PRA/882000/MU	Cylinder with extended piston rod	7
	•	•	•	•	•	•	PRA/882000/MG	Cylinder with piston rod bellow	8




For the cylinder models style C, D, E, S and V see options selector

Option selector

P★A/882★/★/★/★/★/★/★

Piston rod material	Substitute
Stainless steel (martensitic); Standard wiper seal	R
Stainless steel (austenitic); Standard wiper seal	S
Hard chromium plated; Standard wiper seal	C
Stainless steel (austenitic); hard chromium plated; Standard wiper seal	D
Stainless steel (austenitic); Smooth wiper seal	V
Stainless steel (austenitic); hard chromium plated; Smooth wiper seal	E
Cylinder Ø (mm)	Substitute
032, 040, 050, 063, 080, 100	
Variants (magnetic piston)	Substitute
Standard	MI
Piston rod bellow	MG
Special wiper seal	W2
Extended piston rod,	MU
P★A/882★/MU/★/★/★/★/★ /W6/ → Extension (mm)	

Note: This options selector explains only the cylinder variants.
 For combinations of cylinder variants consult our technical Service


Strokes (mm)	1000 max.
Switch variants	Substitute
Without	0
Adjustable Reed switch position	3*2)
Adjustable solid state switch position	4
Valve function *1)	Substitute
5/2 way solenoid/spring, cylinder instroke without current	R
	
5/2 way solenoid/spring, cylinder outstroke without current	E
	
5/2 way solenoid operated, solenoid return, bistable	B
	
5/3 way solenoid operated, solenoid return, all ports blocked (APB)	A
	
5/3 way solenoid operated, solenoid return, centre open exhaust (COE)	C
	

*1) Version with pilot operated valves on request.


*2) For Ø 40 ... 100 mm only

Reduced Installation Time & Cost


To connect the IVAC you simply run a single ring main to provide an air supply to each unit. There is no mounting of valve islands to the machine framework or inside a cabinet and there is no pipework to run around the machine to connect each valve to each actuator.

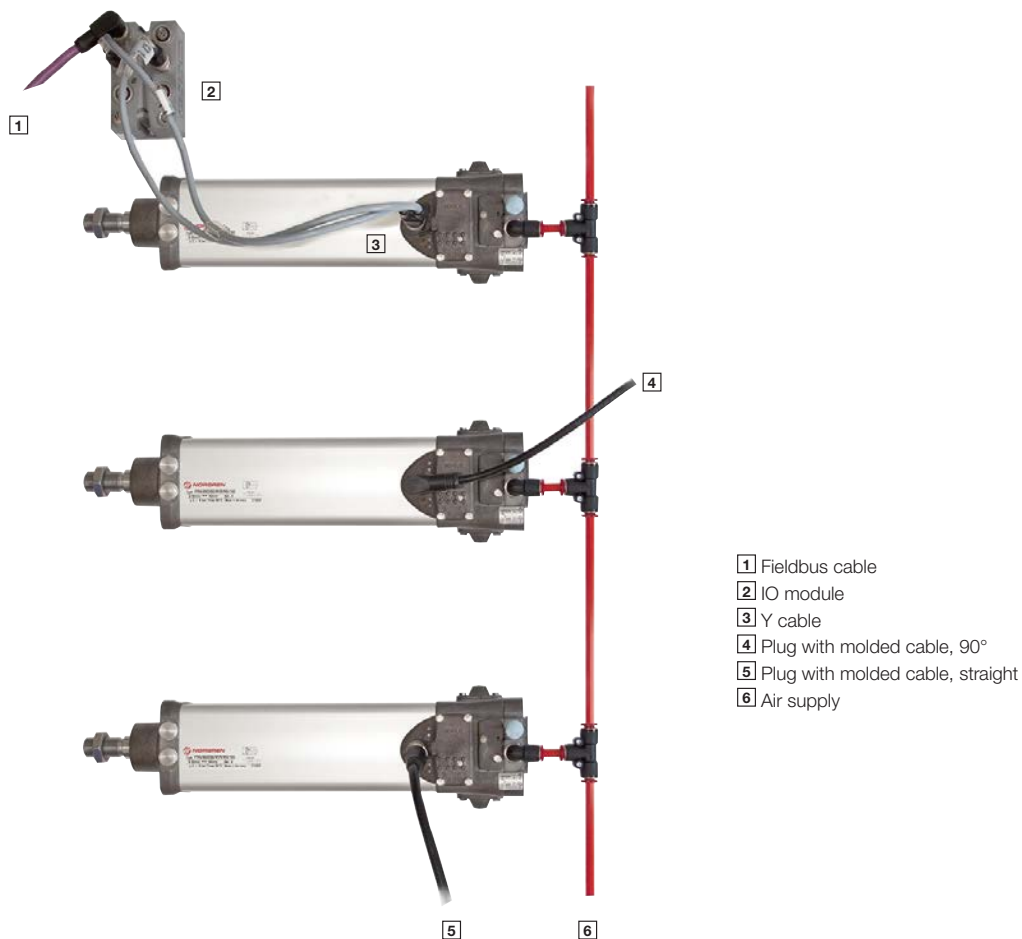

One of the advantages of the IVAC cylinders is to use the output ports (2 & 4) from the main valve to operate an additional cylinder.

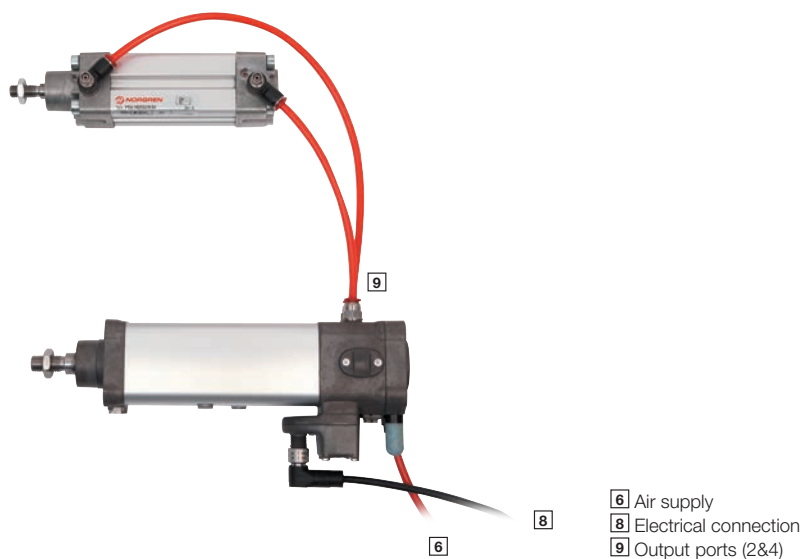

Mountings and service kit

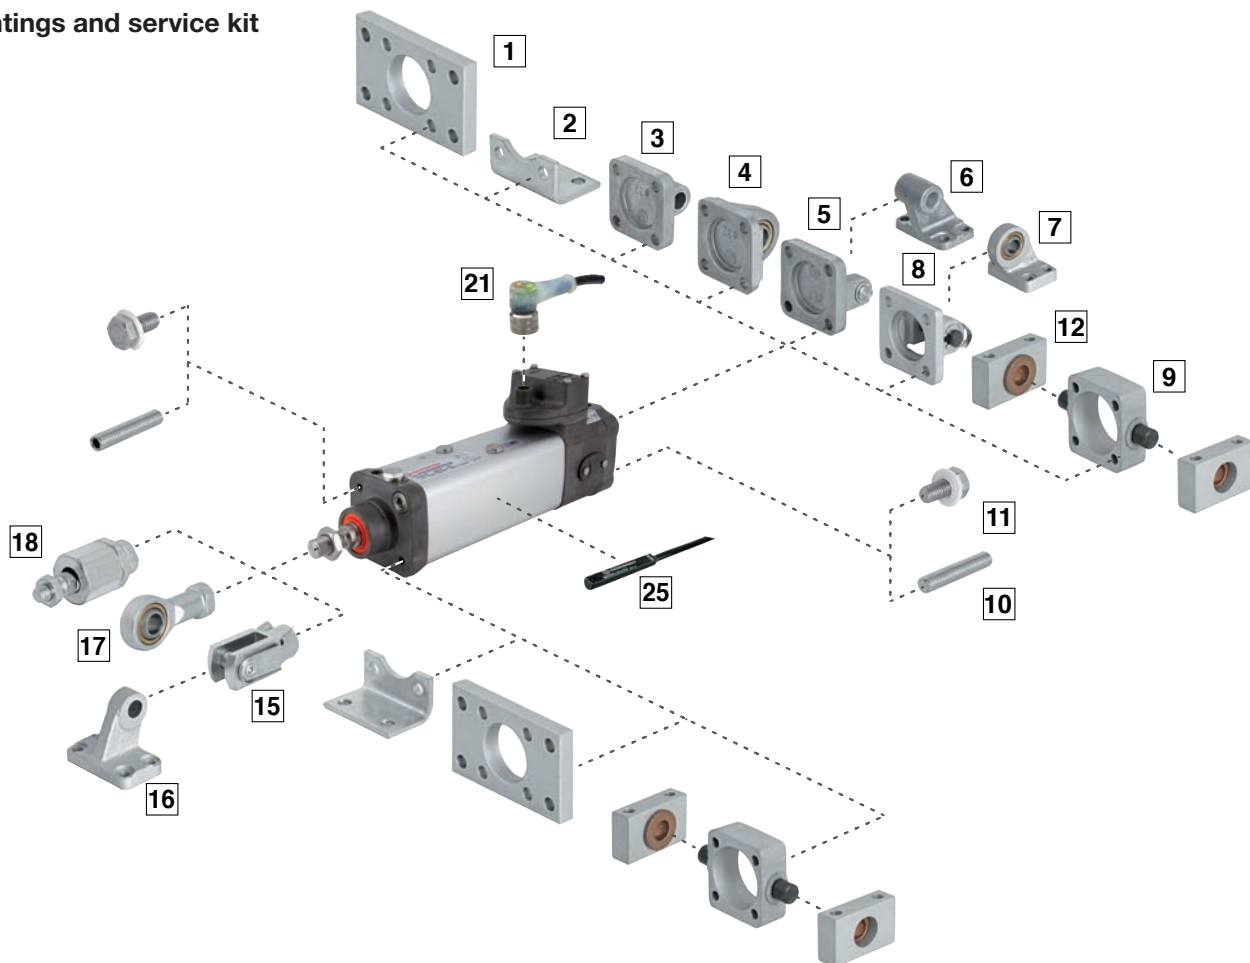

Position	Style	Standard	Corrosion protected	Stainless steel
1	B, G	Clear anodised aluminium	Clear anodised aluminium. Screws: A2	X 5 Cr Ni 18 10 (1.4301; AISI 304). Screws: A2
2	C	Galvanized steel (ø 32 ... 63 mm) Painted steel (ø 80 & 100 mm)	—	X 5 Cr Ni 18 10 (1.4301; AISI 304). Screws: A2
3	R	Diecast aluminium	Black corrosion protected diecast aluminium. Certified for the food industry. Screws: A2	-
4	UR	Galvanized aluminium Inner ring: steel Outer ring: brass	Black corrosion protected diecast aluminium Certified for the food industry Inner ring: stainless Steel (austenitic) Outer ring: nickel plated hardened steel	-
5	D	Diecast aluminium Bolt: galvanized steel (martensitic) Circlip: galvanized steel	Black corrosion protected diecast aluminium Certified for the food industry Bolt: X 10 Cr Ni S 18 9 (1.4305, AISI 303) Circlip: Stainless steel (martensitic). Screws: A2	X 5 Cr Ni 18 10 (1.4301; AISI 304). Screws: A2 Bolt: X 10 Cr Ni S 18 9 (1.4305; AISI 303)
6	SW	Diecast aluminium	Black corrosion protected diecast aluminium Certified for the food industry	X 6 Cr Ni 18 9 (1.4308; AISI 304)
7	US	Galvanized aluminium. Inner ring: steel Outer ring: brass	—	—
8	D2	Painted cast iron. Bolt: stainless steel (martensitic) Circlip: galvanized steel	—	—
9	FH	Cast iron	—	—
10	A	Galvanized steel	—	—
11	Screw	—	—	X 10 Cr Ni S 18 9 (1.4305, AISI 303)
12	S	Clear anodised aluminium Bearing: brass	—	—
15	F	Galvanized steel Bolt: galvanized steel Circlip: Galvanized steel	Nickel plated steel Circlip: X 10 Cr Ni S 18 9 (1.4305, AISI 303) Bolt: X 10 Cr Ni S 18 9 (1.4305, AISI 303)	X 10 Cr Ni S 18 9 (1.4305; AISI 303) Bolt: X 10 Cr Ni S 18 9 (1.4305; AISI 303) Eyebolt: X 10 Cr Ni S 18 9 (1.4305; AISI 303)
16	SS	Painted cast iron	—	—
17	UF	Galvanized steel. Inner ring: steel Outer ring: brass	Nickel plated steel. Inner ring: stainless steel (austenitic) Outer ring: nickel plated hardened steel.	X 10 Cr Ni S 18 9 (1.4305; AISI 303), Inner ring X 105 Cr Co Mo 18-2 (1.4528), Outer ring X 5 Cr Ni 18 10 (1.4301; AISI 304)
18	AK	Galvanized steel	—	—

Mountings

Model	A	AK	B, G	C	D	D2	F	FH	R
									
Cyl. Ø	10 Page 9	18 Page 9	1 Page 9	2 Page 9	5 Page 10	8 Page 10	15 Page 10	9 Page 10	3 Page 11
32	QM/8032/35	QM/8025/38	QA/8032/22	QA/8032/21	QA/8032/23	QA/8032/42	QM/8025/25	QA/8032/34	QA/8032/27
40	QM/8032/35	QM/8040/38	QA/8040/22	QA/8040/21	QA/8040/23	QA/8040/42	QM/8040/25	QA/8040/34	QA/8040/27
50	QM/8050/35	QM/8050/38	QA/8050/22	QA/8050/21	QA/8050/23	QA/8050/42	QM/8050/25	QA/8050/34	QA/8050/27
63	QM/8050/35	QM/8050/38	QA/8063/22	QA/8063/21	QA/8063/23	QA/8063/42	QM/8050/25	QA/8063/34	QA/8063/27
80	QM/8080/35	QM/8080/38	QA/8080/22	QA/8080/21	QA/8080/23	QA/8080/42	QM/8080/25	QA/8080/34	QA/8080/27
100	QM/8080/35	QM/8080/38	QA/8100/22	QA/8100/21	QA/8100/23	QA/8100/42	QM/8080/25	QA/8100/34	QA/8100/27
Corrosion protected									
32	—	—	PVQA/8032/22	—	PVQA/8032/23	—	PVQM/8025/25	—	PVQA/8032/27
40	—	—	PVQA/8040/22	—	PVQA/8040/23	—	PVQM/8040/25	—	PVQA/8040/27
50	—	—	PVQA/8050/22	—	PVQA/8050/23	—	PVQM/8050/25	—	PVQA/8050/27
63	—	—	PVQA/8063/22	—	PVQA/8063/23	—	PVQM/8050/25	—	PVQA/8063/27
80	—	—	PVQA/8080/22	—	PVQA/8080/23	—	PVQM/8080/25	—	PVQA/8080/27
100	—	—	PVQA/8100/22	—	PVQA/8100/23	—	PVQM/8080/25	—	PVQA/8100/27
Stainless steel									
32	—	—	KQA/8032/22	KQA/8032/21	KQA/8032/23	—	KQM/55433/25	—	—
40	—	—	KQA/8040/22	KQA/8040/21	KQA/8040/23	—	KQM/55441/25	—	—
50	—	—	KQA/8050/22	KQA/8050/21	KQA/8050/23	—	KQM/55451/25	—	—
63	—	—	KQA/8063/22	KQA/8063/21	KQA/8063/23	—	KQM/55451/25	—	—
80	—	—	KQA/8080/22	KQA/8080/21	KQA/8080/23	—	KQA/8080/25	—	—
100	—	—	KQA/8100/22	KQA/8100/21	KQA/8100/23	—	KQA/8080/25	—	—
	S	SS	SW	UF	UR	US	Cover screws	Magnetically operated switches	
									
Cyl. Ø	12 Page 11	16 Page 12	6 Page 11	17 Page 11	4 Page 12	7 Page 12	11 Page 12	25 Page 13	
32	QA/8032/41	M/P19931	M/P19493	QM/8025/32	QA/8032/33	M/P40310			
40	QA/8040/41	M/P19932	M/P19494	QM/8040/32	QA/8040/33	M/P40311			
50	QA/8040/41	M/P19933	M/P19495	QM/8050/32	QA/8050/33	M/P40312			
63	QA/8063/41	M/P19934	M/P19496	QM/8050/32	QA/8063/33	M/P40313			
80	QA/8063/41	M/P19935	M/P19497	QM/8080/32	QA/8080/33	M/P40314			
100	QA/8100/41	M/P19936	M/P19498	QM/8080/32	QA/8100/33	M/P40315			
Corrosion protected									
32	—	—	M/P40459	PVQM/8025/32	PVQA/8032/33	—	—		
40	—	—	M/P40460	PVQM/8040/32	PVQA/8040/33	—	—		
50	—	—	M/P40461	PVQM/8050/32	PVQA/8050/33	—	—		
63	—	—	M/P40462	PVQM/8050/32	PVQA/8063/33	—	—		
80	—	—	M/P40463	PVQM/8080/32	PVQA/8080/33	—	—		
100	—	—	M/P40464	PVQM/8080/32	PVQA/8100/33	—	—		
Stainless steel									
32	—	—	M/P72288	KQM/8032/32	—	—	PVQA/882032/88		
40	—	—	M/P72289	KQM/8040/32	—	—	PVQA/882032/88		
50	—	—	M/P72290	KQM/8050/32	—	—	PVQA/882050/88		
63	—	—	M/P72291	KQM/8050/32	—	—	PVQA/882050/88		
80	—	—	M/P72292	KQM/8080/32	—	—	PVQA/882080/88		
100	—	—	M/P72293	KQM/8080/32	—	—	PVQA/882080/88		


M12 cables

Cable length	Plug with moulded cable IP 67	Y-cable, M12 female 8 pin, 2 x M12 male 4 pin IP67
		
(m)	21	21
2	M/P74581/2 (straight)	M/P74589 (0,45 m)
5	M/P74581/5 (straight)	
10	M/P74581/10 (straight)	
2	M/P74582/2 (90°)	
5	M/P74582/5 (90°)	
10	M/P74582/10 (90°)	

Service kit

	Service Kit
	
Cyl. Ø	
32	PRQA/882032/00
40	PRQA/882040/00
50	PRQA/882050/00
63	PRQA/882063/00
80	PRQA/882080/00
100	PRQA/882100/00

Wiring diagram for M12 male connector




Valves		Wiring diagram for connector cable M/P74581/., M/P74582/.
Pin 1	Not used	White
Pin 2	Solenoid 2 (instroke)	Brown
Pin 3	0 V	Green
Pin 4	Solenoid 1 (outstroke)	Yellow

Switches		Wiring diagram for connector cable M/P74581/., M/P74582/.
Pin 5	+ 24 V d.c.	Grey
Pin 6	Switch 2 (rear end cover)	Pink
Pin 7	0 V	Blue
Pin 8	Switch 1 (front end cover)	Red

Dimensions

Dimensions in mm
Projection/First angle

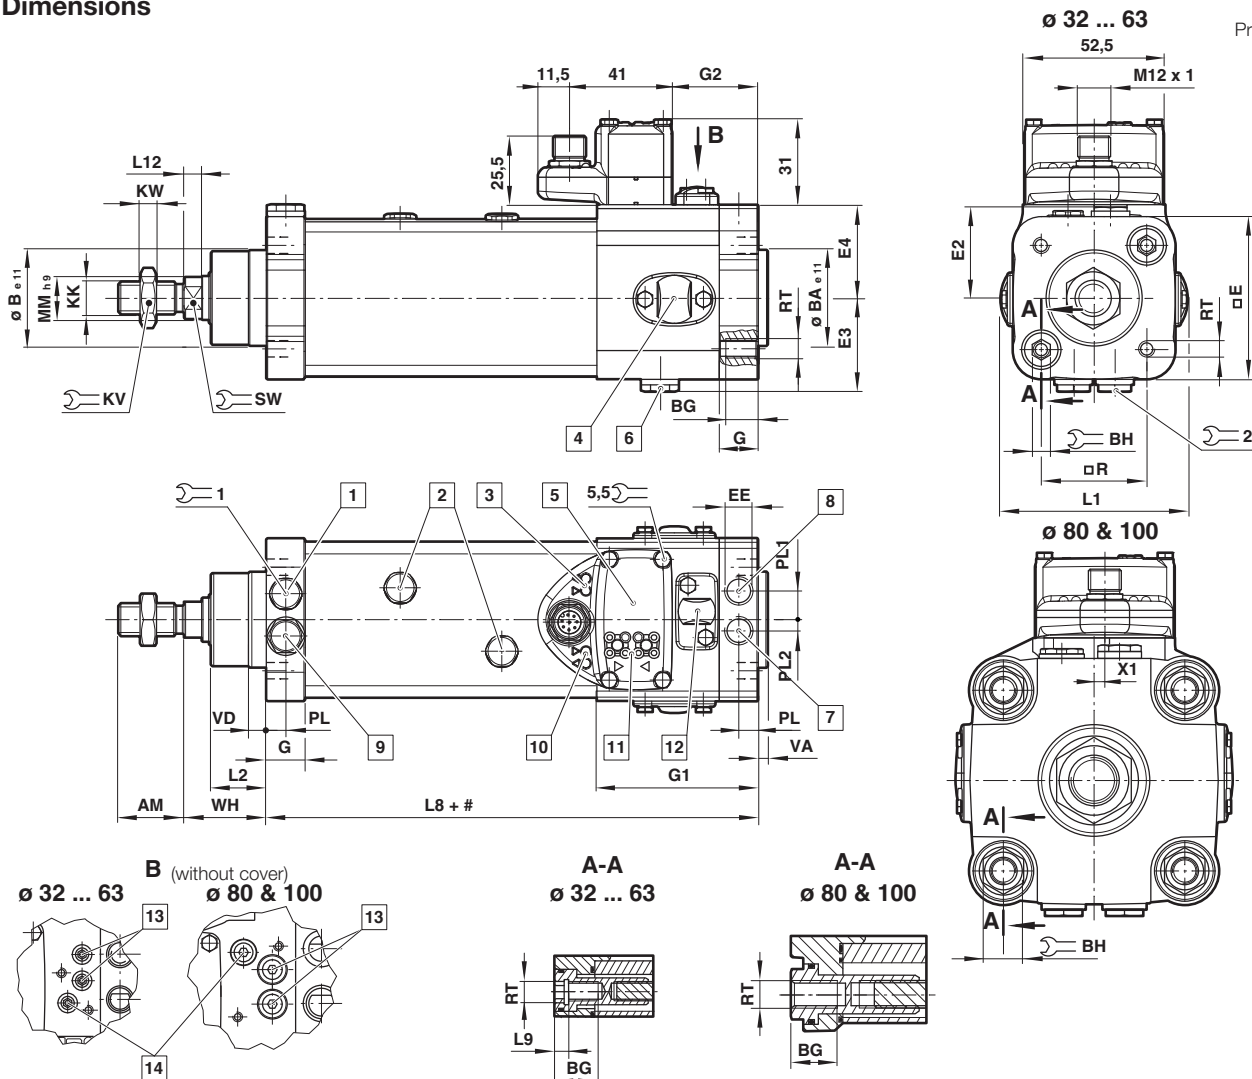

Stroke

- 1 Cushion adjustment front end cover
- 2 Magnetically operated switches (AF 11)
- 3 LED - magnetically operated switches
- 4 Main valve

- 5 Pilot block
- 6 Output ports (2&4)
- 7 Air supply
- 8 Exhaust position, do not obstruct
- 9 Without function - do not use

- 10 LED - pilot valve
- 11 Manual override
- 12 Cover for cushion and Speed control adjustment
- 13 Speed control adjustment
- 14 Cushion adjustment rear end cover

Ø	AM	Ø B e11	Ø BA e11	BG	BH	□ E	E2	E3	E4	EE	G	G1	G2	KK	KW	L1	L2	L8	L9	L12
32	22	30	30	16	6	53	31	31	32	G1/8	14	59	30,5	M10x1,25	5	68,5	20	94	4	4,5
40	24	35	35	16	6	60	34,5	34	34	G1/8	14	59	30,5	M12x1,25	6	68,5	21	105	4	6,5
50	32	40	40	16	8	71,5	40	39	39	G1/8	14	63	34,5	M16x1,5	8	92,5	28	106	5	6,5
63	32	45	45	16	8	82	46	45,5	45,5	G1/4	19	66	38	M16x1,5	8	91,5	28	121	5	6,5
80	40	45	45	17	16	99	54	54	57	G1/4	19	74,5	46,5	M20x1,5	10	110	35	128	-	7,5
100	40	55	55	17	16	119	65	65	65	G3/8	24,5	81	53	M20x1,5	10	144,5	38	138	-	10
Ø	Ø MM h9	PL	PL1	PL2	□ R	RT	VA	VD	WH	X1	□ KV	□ SW	□ 1	□ 2	at 0 mm	per 25 mm	Model			
32	12	7	10,5	4	32,5	M 6	3	6	26	0	17	10	11	12	0,66 kg	0,07 kg	PRA/882032/MI+/M-/*			
40	16	7	10,5	4	38	M 6	3,5	6	30	0	19	13	11	12	1,03 kg	0,11 kg	PRA/882040/MI+/M-/*			
50	20	7	12,5	4	46,5	M 8	3,5	6	37	1,5	24	17	13	12	1,58 kg	0,18 kg	PRA/882050/MI+/M-/*			
63	20	9,5	14,5	6	56,5	M 8	4	6	37	0	24	17	13	15	2,42 kg	0,19 kg	PRA/882063/MI+/M-/*			
80	25	9,5	14	6	72	M 10	4	6	46	6	30	22	17	15	4,12 kg	0,29 kg	PRA/882080/MI+/M-/*			
100	25	12	16,5	8,5	89	M 10	4	6	51	6,5	30	22	17	19	6,34 kg	0,35 kg	PRA/882100/MI+/M-/*			


* Please insert standard stroke length

+ Please insert valve function

- Please insert switch variants (Reed switches for Ø 40 ... 100 mm only)

P.A/882000/MG./M./.; Cylinder with piston rod bellow

Dimensions in mm
 Projection/First angle

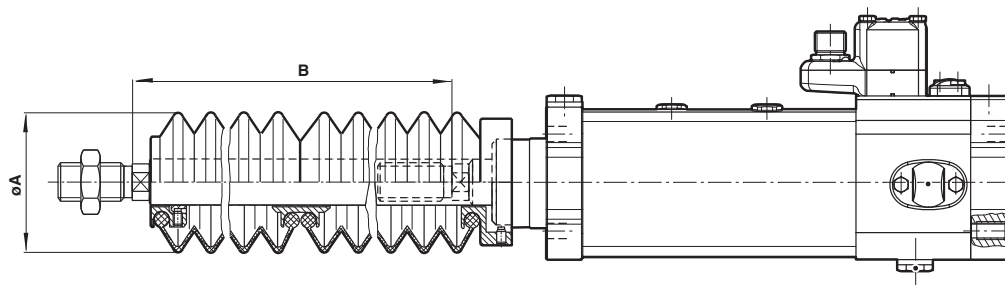

Cyl. Ø	Ø A	Stroke max	Piston rod extention B		Model
			for first bellow	for further bellows	
32	40	60	30	25	P#A/882032/MG+/M./*
40	63	145	50	32	P#A/882040/MG+/M./*
50	63	145	40	32	P#A/882050/MG+/M./*
63	63	145	40	32	P#A/882063/MG+/M./*
80	80	250	50	45	P#A/882080/MG+/M./*
100	80	250	50	45	P#A/882100/MG+/M./*

* Standard stroke length

Piston rod material


+ Valve function

. Magnetic switch (Reed switches for Ø 40 ... 100 mm only)

Mountings

Front or rear stud mounting A

Conforms to ISO 15552, type MX1

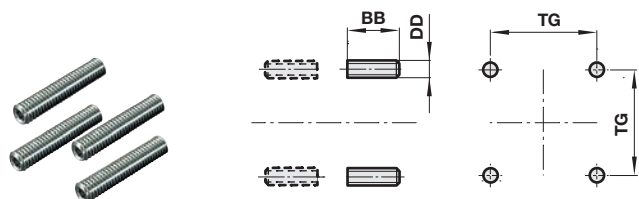


Standard

Ø	BB	DD	TG	kg	Model (A)
32/40	17	M6	32,5/38	0,02	QM/8032/35
50/63	23	M8	46,5/56,5	0,05	QM/8050/35
80/100	28	M10	72/89	0,08	QM/8080/35

Piston rod swivel AK

Dimensions in mm
Projection/First angle

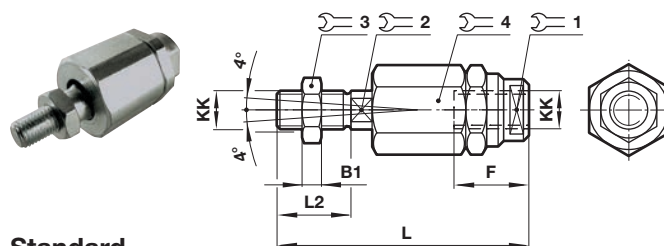


Standard

Ø	KK	B1	F	L	L2	1	2	3	4	kg	Model (AK)
32	M10x1,25	5	26	73	20	19	12	17	30	0,20	QM/8025/38
40	M12x1,25	6	26	77	24	19	12	19	30	0,20	QM/8040/38
50/63	M16x1,5	8	34	106	32	30	19	24	42	0,65	QM/8050/38
80/100	M20x1,5	10	42	122	40	30	19	30	42	0,72	QM/8080/38

Front flange B, G

Conforms to ISO 15552, type MF1 and MF2

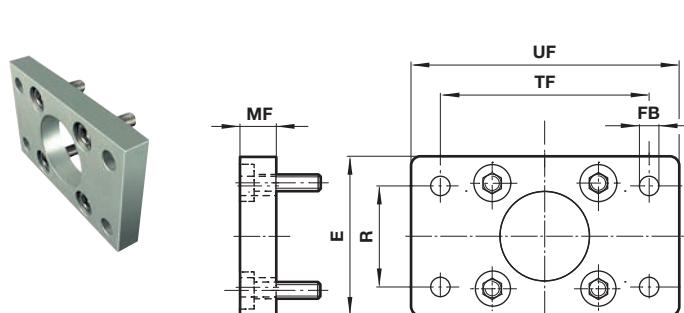

Standard

Ø	E	Ø FB	MF	R	TF	UF	kg	Model (B, G)
32	50	7	10	32	64	80	0,25	QA/8032/22
40	55	9	10	36	72	90	0,35	QA/8040/22
50	65	9	12	45	90	110	0,70	QA/8050/22
63	75	9	12	50	100	125	0,80	QA/8063/22
80	100	12	16	63	126	154	1,35	QA/8080/22
100	120	14	16	75	150	186	2,20	QA/8100/22

Corrosion protected version


32	50	7	10	32	64	80	0,25	PVQA/8032/22
40	55	9	10	36	72	90	0,35	PVQA/8040/22
50	65	9	12	45	90	110	0,7	PVQA/8050/22
63	75	9	12	50	100	125	0,8	PVQA/8063/22
80	100	12	16	63	126	154	1,35	PVQA/8080/22
100	120	14	16	75	150	186	2,2	PVQA/8100/22

Stainless steel

32	50	7	10	32	64	80	0,26	KQA/8032/22
40	55	9	10	36	72	90	0,31	KQA/8040/22
50	65	9	12	45	90	110	0,56	KQA/8050/22
63	75	9	12	50	100	125	0,73	KQA/8063/22
80	100	12	16	63	126	154	1,73	KQA/8080/22
100	120	14	16	75	150	186	2,51	KQA/8100/22

Foot mounting C

Conforms to ISO 15552, type MS1

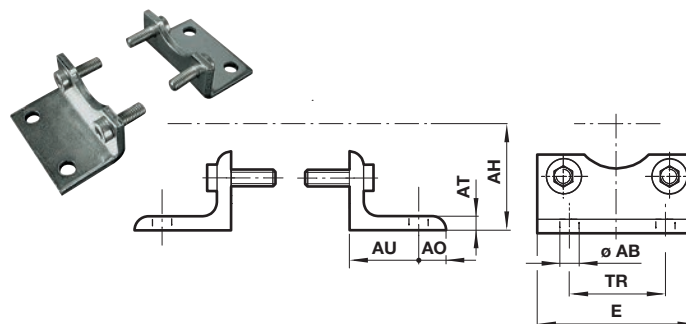

Standard


Ø	Ø AB	AH	AO	AT	AU	E	TR	kg	Model (C)
32	7	32	8	4	24	48	32	0,15	QA/8032/21
40	10	36	9	4	28	53	36	0,18	QA/8040/21
50	10	45	10	5	32	64	45	0,30	QA/8050/21
63	10	50	12	5	32	74	50	0,39	QA/8063/21
80	12	63	19	5	41	98	63	0,80	QA/8080/21
100	14	71	19	5	41	115	75	0,95	QA/8100/21

Stainless steel

32	7	32	11	4	24	48	32	0,16	KQA/8032/21
40	9	36	12	5	28	53	36	0,19	KQA/8040/21
50	9	45	13	5	32	64	45	0,32	KQA/8050/21
63	9	50	13	5	32	74	50	0,41	KQA/8063/21
80	12	63	19	6	41	98	63	0,83	KQA/8080/21
100	14	71	19	6	41	115	75	0,98	KQA/8100/21

Rear clevis D

Conforms to ISO 15552, type MP2

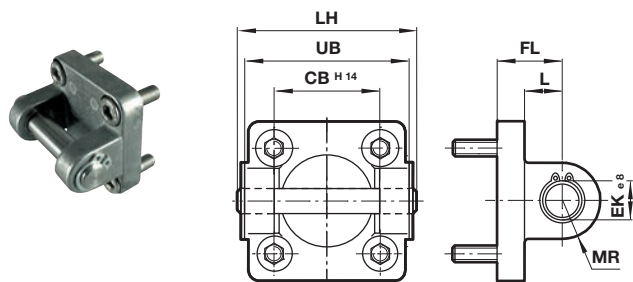

Standard

Ø	CB H14	Ø EK e8	FL	L	LH	MR	UB	kg	Model (D)
32	26	10	22	13	52	9	45	0,11	QA/8032/23
40	28	12	25	16	60	12	52	0,16	QA/8040/23
50	32	12	27	17	68	12	60	0,22	QA/8050/23
63	40	16	32	22	79	15	70	0,34	QA/8063/23
80	50	16	36	22	99	15	90	0,54	QA/8080/23
100	60	20	41	27	119	20	110	0,90	QA/8100/23

Corrosion protected version


32	26	10	22	13	52	9	45	0,11	PVQA/8032/23
40	28	12	25	16	60	12	52	0,16	PVQA/8040/23
50	32	12	27	17	68	12	60	0,22	PVQA/8050/23
63	40	16	32	22	79	15	70	0,34	PVQA/8063/23
80	50	16	36	22	99	15	90	0,54	PVQA/8080/23
100	60	20	41	27	119	20	110	0,9	PVQA/8100/23

Stainless steel

32	26	10	22	13	52	9	45	0,11	KQA/8032/23
40	28	12	25	16	60	12	52	0,16	KQA/8040/23
50	32	12	27	17	68	12	60	0,22	KQA/8050/23
63	40	16	32	22	79	15	70	0,34	KQA/8063/23
80	50	16	36	22	99	15	90	0,54	KQA/8080/23
100	60	20	41	27	119	20	110	0,9	KQA/8100/23

Piston rod clevis F

Conforms to DIN ISO 8140

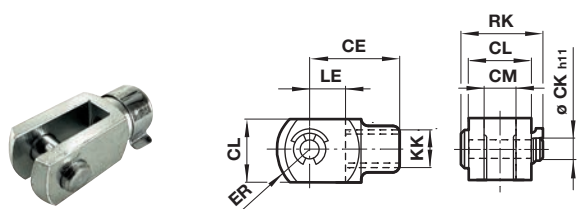

Standard

Ø	KK	CE	Ø CKh11	CL	CM	ER	LE	RK	kg	Model (F)
32	M10x1,25	40	10	20	10	16	20	28	0,09	QM/8025/25
40	M12x1,25	48	12	24	12	19	24	32	0,13	QM/8040/25
50/63	M16x1,5	64	16	32	16	25	32	41,5	0,33	QM/8050/25
80/100	M20x1,5	80	20	40	20	32	40	50	0,67	QM/8080/25

Corrosion protected version

32	M10x1,25	40	10	20	10	16	20	28	0,09	PVQM/8032/25
40	M12x1,25	48	12	24	12	19	24	32	0,13	PVQM/8040/25
50/63	M16x1,5	64	16	32	16	25	32	41,5	0,33	PVQM/8050/25
80/100	M20x1,5	80	20	40	20	32	40	50	0,67	PVQM/8080/25


Stainless steel

32	M10x1,25	40	10	20	10	16	20	28	0,09	KQM/55433/25
40	M12x1,25	48	12	24	12	19	24	32	0,13	KQM/55441/25
50/63	M16x1,5	64	16	32	16	25	32	41,5	0,33	KQM/55451/25
80/100	M20x1,5	80	20	40	20	32	40	50	0,67	KQM/8080/25

Rear clevis D2

Conforms to ISO 15552, type AB6

Dimensions in mm
 Projection/First angle

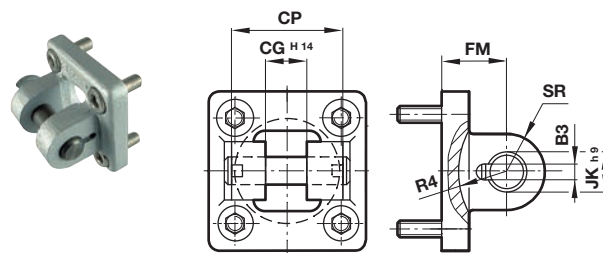


Standard

Ø	B1 H14	B2	B3	Ø EK h9	FL	R1	R2	kg	Model (D2)
32	14	34	3,3	10	22	11	17	0,20	QA/8032/42
40	16	40	4,3	12	25	12	20	0,23	QA/8040/42
50	21	45	4,3	16	27	14,5	22	0,36	QA/8050/42
63	21	51	4,3	16	32	18	25	0,55	QA/8063/42
80	25	65	4,3	20	36	22	30	0,90	QA/8080/42
100	25	75	4,3	20	41	22	32	1,45	QA/8100/42


Front or rear detachable trunnion FH

Conforms to VDMA 24562 part 2,
 type MT 5/6

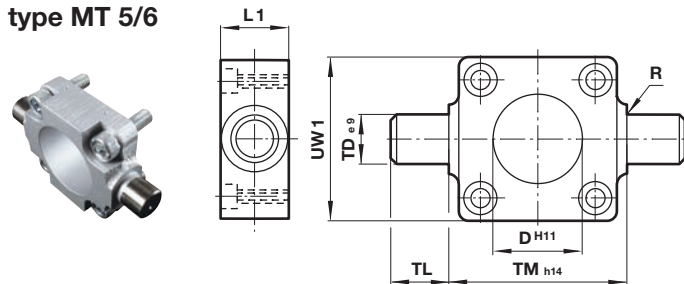


Standard

Ø	Ø D h11	L1	R	Ø TD e9	TL	TM h14	UW1	kg	Model (FH)
32	30	16	1	12	12	50	45	0,20	QA/8032/34
40	35	20	1,6	16	16	63	55	0,38	QA/8040/34
50	40	24	1,6	16	16	75	65	0,60	QA/8050/34
63	45	24	1,6	20	20	90	75	1,10	QA/8063/34
80	45	28	1,6	20	20	110	100	1,90	QA/8080/34
100	55	38	2	25	25	132	120	3,50	QA/8100/34

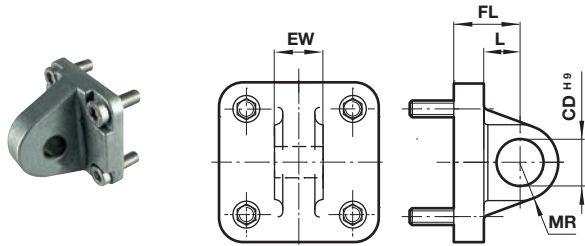
Rear eye R
Conforms to ISO 15552, type MP4

Standard

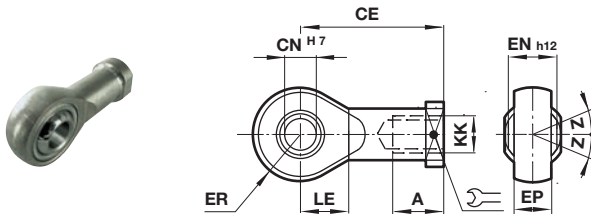Ø	Ø CD H9	EW	FL	L	MR	kg	Model (R)
32	10	25,8	22	13	9	0,09	QA/8032/27
40	12	27,8	25	16	12	0,11	QA/8040/27
50	12	31,7	27	17	12	0,17	QA/8050/27
63	16	39,7	32	22	15	0,24	QA/8063/27
80	16	49,7	36	22	15	0,37	QA/8080/27
100	20	59,7	41	27	20	0,59	QA/8100/27
Corrosion protected version							
32	10	25,8	22	13	9	0,09	PVQA/8032/27
40	12	27,8	25	16	12	0,11	PVQA/8040/27
50	12	31,7	27	17	12	0,17	PVQA/8050/27
63	16	39,7	32	22	15	0,24	PVQA/8063/27
80	16	49,7	36	22	15	0,37	PVQA/8080/27
100	20	59,7	41	27	20	0,59	PVQA/8100/27


Universal piston rod eye UF
Conforms to DIN ISO 8139

Standard

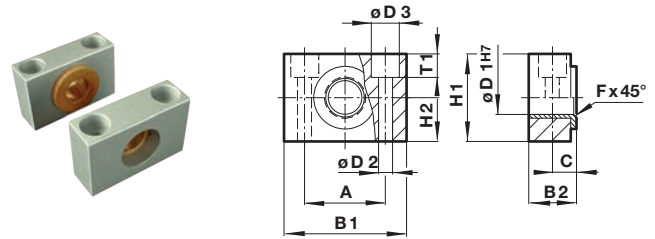Ø	Thread KK	AX	CE	Ø CN H7	EN -0,1	ER	LE	Z	kg	Model (UF)
32	M10x1,25	20	43	10	14	14	15	13°	0,09	QM/8025/32
40	M12x1,25	22	50	12	16	16	17	13°	0,13	QM/8040/32
50/63	M16x1,5	28	64	16	21	21	22	15°	0,33	QM/8050/32
80/100	M20x1,5	33	77	20	25	25	26	15°	0,67	QM/8080/32
Corrosion protected version										
32	M10x1,25	20	43	10	14	14	15	13°	0,09	PVQM/8025/32
40	M12x1,25	22	50	12	16	16	17	13°	0,13	PVQM/8040/32
50/63	M16x1,5	28	64	16	21	21	22	15°	0,33	PVQM/8050/32
80/100	M20x1,5	33	77	20	25	25	26	15°	0,4	PVQM/8080/32
Stainless steel										
32	M10x1,25	20	43	10	14	14,5	14	13°	0,07	KQM/8032/32
40	M12x1,25	22	50	12	16	16,5	16	13°	0,11	KQM/8040/32
50/63	M16x1,5	28	64	16	21	21,5	21	15°	0,21	KQM/8050/32
80/100	M20x1,5	33	77	20	25	25,5	25	15°	0,38	KQM/8080/32

Trunnion support S
Conforms to ISO 15552, type AT4


 Dimensions in mm
Projection/First angle

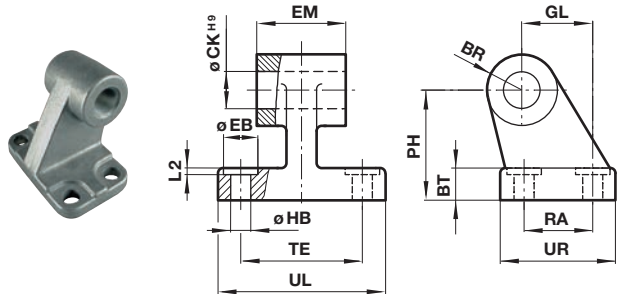Standard

Ø	A	B	2	C	Ø D1H7	Ø D2	Ø D3	F x 45°	H	2	T1	kg	Model (S)
32	32	46	18	10,5	12	6,6	11	1	30	15	6,8	0,10	QA/8032/41
40/50	36	55	21	12	16	9	15	1,6	36	18	9	0,14	QA/8040/41
63/80	42	65	23	13	20	11	18	1,6	40	20	11	0,18	QA/8063/41
100	50	75	28,5	16	25	14	20	2	50	25	13	0,34	QA/8100/41

Wide hinge SW
Conforms to ISO 15552, type AB7

Standard

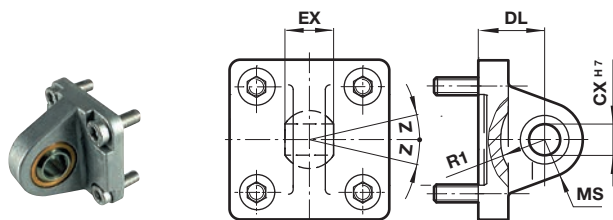
Ø	CA	Ø CK H9	Ø D	H	EM	G	G	G	K	K	L	R	Ø S	kg	Model (SW)
32	32	10	11	7	25,5	21	18	31	38	50	1,6	10	6,6	0,05	M/P19493
40	36	12	11	9	27,5	24	22	35	41	54	1,6	11	6,6	0,07	M/P19494
50	45	12	15	11	31,5	33	30	45	50	65	1,6	13	9	0,14	M/P19495
63	50	16	15	12	39,5	37	35	50	52	67	1,6	15	9	0,18	M/P19496
80	63	16	18	14	49,5	47	40	60	66	84	2,5	15	11	0,28	M/P19497
100	71	20	18	15	59,5	55	50	70	76	94	2,5	19	11	0,42	M/P19498
Corrosion protected version															
32	32	10	11	8	26,5	21	18	31	38	51	1,6	10	6,6	0,05	M/P40459
40	36	12	11	10	28,5	24	22	35	41	54	1,6	11	6,6	0,07	M/P40460
50	45	12	15	12	32,5	33	30	45	50	65	1,6	13	9	0,14	M/P40461
63	50	16	15	12	40,5	37	35	50	52	67	1,6	15	9	0,18	M/P40462
80	63	16	18	14	50,5	47	40	60	66	86	2,5	15	11	0,28	M/P40463
100	71	20	18	15	60,5	55	50	70	76	96	2,5	19	11	0,42	M/P40464
Stainless steel															
32	32	10	11	8	26	21	18	31	38	51	1,6	10	6,6	0,15	M/P72288
40	36	12	11	10	28	24	22	35	41	53	1,6	11	6,6	0,21	M/P72289
50	45	12	15	12	32	33	30	45	50	65	1,6	13	9	0,41	M/P72290
63	50	16	15	12	40	37	35	50	52	67	1,6	15	9	0,53	M/P72291
80	63	16	18	14	50	47	40	60	66	86	2,5	15	11	0,82	M/P72292
100	71	20	18	15	60	55	50	70	76	96	2,5	19	11	1,22	M/P72293

Universal rear eye UR
Conforms to ISO 15552, type MP6



Narrow hinge SS

Dimensions in mm
 Projection/First angle

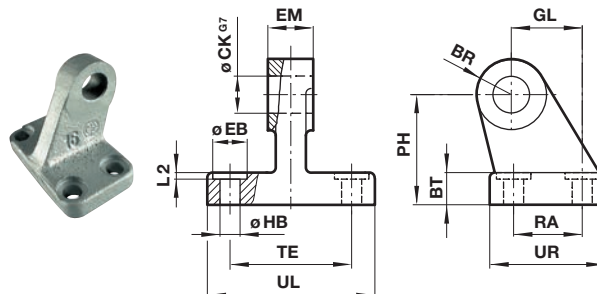


Standard

Ø	Ø CN H7	EN	ER	FL	R	Z	kg	Model (UR)
32	10	14	16	22	14,5	13°	0,15	QA/8032/33
40	12	16	18	25	18	13°	0,25	QA/8040/33
50	16	21	21	27	19	15°	0,40	QA/8050/33
63	16	21	23	32	24	15°	0,55	QA/8063/33
80	20	25	28	36	24	15°	0,90	QA/8080/33
100	20	25	30	41	29	15°	1,50	QA/8100/33
Corrosion protected version								
32	10	14	16	22	14,5	13°	0,15	PVQA/8032/33
40	12	16	19	25	18	13°	0,25	PVQA/8040/33
50	16	21	21	27	19	13°	0,4	PVQA/8050/33
63	16	21	24	32	24	15°	0,55	PVQA/8063/33
80	20	25	28	36	24	15°	0,9	PVQA/8080/33
100	20	25	30	41	29	15°	1,5	PVQA/8100/33

Standard

Ø	CA	Ø CN G7	Ø D	H2	EM	G1	G2	G3	K1	K2	L1	R	Ø S	kg	Model (SS)
32	32	10	11	8	10	21	18	31	38	51	1,6	10	6,6	0,15	M/P19931
40	36	12	11	10	12	24	22	35	41	54	1,6	11	6,6	0,20	M/P19932
50	45	16	15	12	16	33	30	45	50	65	1,6	13	9	0,48	M/P19933
63	50	16	15	12	16	37	35	50	52	67	1,6	15	9	0,50	M/P19934
80	63	20	18	14	20	47	40	60	66	86	2,5	15	11	0,75	M/P19935
100	71	20	18	15	20	55	50	70	76	96	2,5	19	11	1,20	M/P19936

Swivel hinge US
Conforms to VDMA 24562 part 2

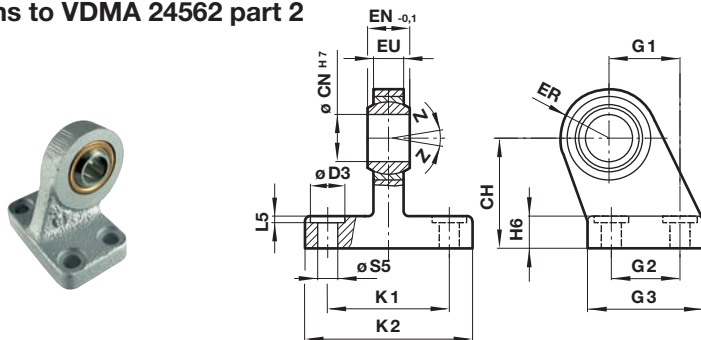

Standard

Ø	CH	Ø CN H7	Ø D	EN -0,1	ER	EU	G1	G2	G3	H2	K1	K2	L1	Ø S	Z	kg	Model (US)
32	32	10	11	14	16	10,5	21	18	31	10	38	51	1,6	6,6	13°	0,19	M/P40310
40	36	12	11	16	18	12	24	22	35	10	41	54	1,6	6,6	13°	0,24	M/P40311
50	45	16	15	21	21	15	33	30	45	12	50	65	1,6	9	13°	0,46	M/P40312
63	50	16	15	21	23	15	37	35	50	12	52	67	1,6	9	15°	0,59	M/P40313
80	63	20	18	25	28	18	47	40	60	14	66	86	2,5	11	15°	1,03	M/P40314
100	71	20	18	25	30	18	55	50	70	15	76	96	2,5	11	15°	1,40	M/P40315

Cover screw (stainless steel)



Ø	M		K	L	kg	Model
32/40	M6	10	5,5	10,5	0,018	PVQA/882032/88
50/63	M8	13	6,8	10,5	0,041	PVQA/882050/88
80/100	M10	17	8,4	10	0,072	PVQA/882080/88


Technical data - Reed switches - additional informations see data sheet N/en 4.3.005

Symbol	Voltage *2)		Current maximum	Function	Temperature	LED	Protection class	Features	Cable length	Cable type	Weight	Model
	(V a.c.)	(V d.c.)	(mA)		(°C)				(m)		(g)	
 ± BN ~ BU	10 ... 240	10 ... 170	180	Closer	-25 ... +80	•	IP66	—	2	PVC 2 x 0,25	37	M/50/LSU/2V

*2) Supply voltage 24 V d.c. (± 10%) max for P.A/88200/M only.
Attention: Reed switches for Ø 40 ... 100 mm useable only!

Drawings

M/50/LSU/2V,
Cable length L = 2 m

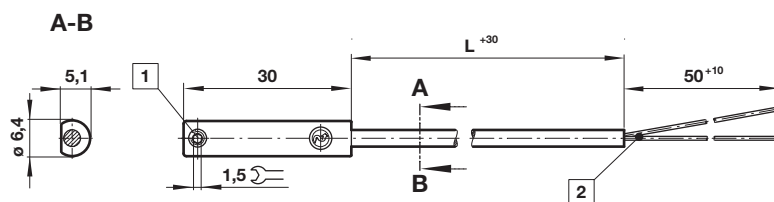


Dimensions in mm
Projection/First angle



- 1 Fixing screw
2 Color code: BK = black; BN = brown; BU = blue


Technical data - Solid state - additional informations see data sheet N/en 4.3.007

Symbol	Voltage *2)		Current max.	Function	Temperature	LED	Protection class	Features	Cable length	Cable type	Weight	Model
	(V d.c.)		(mA)		(°C)				(m)		(g)	
 + BN - BU BK	10 ... 30		150	PNP	-40 ... +80	•	IP67	—	2	PVC 3 x 0,12	37	M/50/EAP/2V

*2) Supply voltage 24 V d.c. (± 10%) max for P.A/88200/M only.

Drawings

M/50/EAP/2V,
Cable length L = 2 m

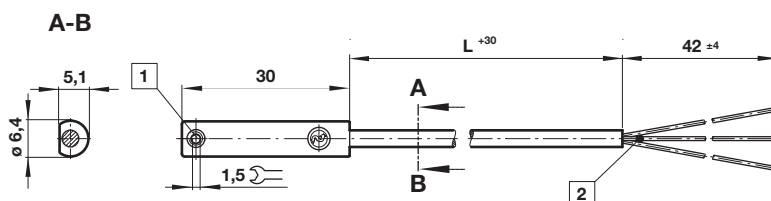

- 1 Fixing screw
2 Color code: BK = black; BN = brown; BU = blue

Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under

»Technical features/data«.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult IMI Precision Engineering, Norgren GmbH.


Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.

- > Ø 32 ... 100 mm
- > Cylinders and mountings conform to ISO 15552
- > Complete functional unit
- > Integrated 5/2 or 5/3 valve
- > Additional output ports (2 & 4)
- > Integrated flow regulator for speed control
- > Reed or solid state switches can be mounted flush with the profile barrel
- > Protection class IP65
- > Energy efficient



Technical features

Medium:

Compressed air, filtered, lubricated or non-lubricated
 Particles size: Class 7, ISO 8573 – 1 (dated 2001)
 Humidity and water content: Air supply must be dry.
 Corresponding of the application and working conditions the air must be dry enough to avoid condensate. The pressure dewpoint must be minimum 15° under the application and working conditions. Oil: Class 4, ISO 8573 – 1 (dated 2001)

Standard:

Based on ISO 15552 (length, mounting pitch and thread dimensions according to ISO 15552. Some outside dimensions different to ISO 15552)

Operation:

Double acting, magnetic piston, adjustable cushioning

Operating pressure:

2 ... 8 bar (29 ... 116 psi)

Port size:

G1/8, G1/4, G3/8

Cylinder diameters:

32, 40, 50, 63, 80, 100 mm

Standard strokes:

See below

Non-standard strokes:

Available (25 ... 1000 mm)

Operating temperature:

-5 ... +80°C max. (+23 ... +176°F)

Supply voltage:

24 V d.c. (±10 %)

(other voltages supply on request)

Power consumption:

2 W max

Electrical connection:

DIN EN175301-803, form C

Manual override:

Turn and lock

Rating:

100 % E.D.

Protection class:

IP 65

Life expectation of the cylinder: *1)

Stroke < 100 mm: 10 Mio. Cycles

Stroke > 100 mm: 5000 km

Life expectation of the solenoid valves:

50 Mio. Cycles

Materials:

Profile barrel:

anodised aluminium,

End covers: pressure diecast

anodised aluminium

Piston rod: stainless steel, see

page 2

Piston rod seals: PUR

Piston seals: PUR

O-rings: NBR

*1) Life expectation based on laboratory conditions (more details upon request):

- Operating pressure: 8 bar
- Compressed air: ISO 8573-1, Class 7-4-4
- Ambient temperature: 20° C +/-10° C
- Environment: Industrial plant, no contamination such as dust and/or moisture or similar
- Position: horizontal
- Side load: max. transverse load approx. 1,3% of the theoretical force at 6 bar
- Speed: 1,0 m/s for Ø 32 to 50 mm
0,7 m/s for Ø 63 to 100 mm
- Frequency: < 20 cycles / min (in/out)



Technical data

Cylinder Ø (mm)	32	40	50	63	80	100
Port size	G 1/8	G 1/8	G 1/8	G 1/4	G 1/4	G 3/8
Piston rod Ø (mm)	12	16	20	20	25	25
Piston rod thread	M10 x 1,25	M12 x 1,25	M16 x 1,5	M16 x 1,5	M20 x 1,5	M20 x 1,5
Cushion length (mm)	11	14	14	19	19	26
Theoretical thrusts at 6 bar outstroke (N)	482	754	1178	1870	3016	4710
Theoretical thrusts at 6 bar instroke (N)	414	633	990	1680	2722	4416
Air consumption at 6 bar outstroke (l/cm)	0,056	0,088	0,137	0,218	0,35	0,55
Air consumption at 6 bar instroke (l/cm)	0,05	0,076	0,117	0,198	0,324	0,514

Standard strokes

Cylinder Ø (mm)	Stroke length (mm)										
	25	50	80	100	125	160	200	250	320	400	500
32	•	•	•	•	•	•	•	•	•	•	•
40	•	•	•	•	•	•	•	•	•	•	•
50	•	•	•	•	•	•	•	•	•	•	•
63	•	•	•	•	•	•	•	•	•	•	•
80	•	•	•	•	•	•	•	•	•	•	•
100	•	•	•	•	•	•	•	•	•	•	•

Cylinder variants

Symbol	R	S	C	D	Model with magnetic piston	Description	Dimensions Page
	•	•	•	•	PRA/862000/MI	Standard cylinder	7
	•	•	•	•	PRA/862000/W2	Cylinder with special wiper/seal (suitable for appl. with cement, plaster (stucco), arizona sand, hoar-frost or ice)	7
	•	•	•	•	PRA/862000/MU	Cylinder with extended piston rod	7
	•	•	•	•	PRA/862000/MG	Cylinder with piston rod bellow	8






For the cylinder models style C, D, and S see options selector

Option selector

P★A/862★/★/★/213A/★/★/★

Piston rod material	Substitute
Stainless steel (martensitic); Standard wiper seal	R
Stainless steel (austenitic); Standard wiper seal	S
Hard chromium plated; Standard wiper seal	C
Stainless steel (austenitic); hard chromium plated; Standard wiper seal	D
Stainless steel (austenitic); Smooth wiper seal	V
Stainless steel (austenitic); hard chromium plated; Smooth wiper seal	E
Cylinder Ø (mm)	Substitute
032, 040, 050, 063, 080, 100	
Variants (magnetic piston)	Substitute
Standard	MI
Piston rod bellow	MG
Special wiper seal	W2
Extended piston rod, P**/862***/MU/***/***/	MU
	Extension (mm)


Note: This options selector explains only the cylinder variants.
 For combinations of cylinder variants consult our technical service.

Strokes (mm)	
1000 max.	
Valve function *1)	Substitute
5/2 way solenoid/spring, cylinder instroke without current	R
	
5/2 way solenoid/spring, cylinder outstroke without current	E
	
5/2 way solenoid operated, solenoid return, bistable	B
	
5/3 way solenoid operated, solenoid return, all ports blocked (APB)	A
	
5/3 way solenoid operated, solenoid return, centre open exhaust (COE)	C
	


*1) Version with pilot operated valves on request.

Reduced Installation Time & Cost


To connect the IVAC you simply run a single ring main to provide an air supply to each unit. There is no mounting of valve islands to the machine framework or inside a cabinet and there is no pipework to run around the machine to connect each valve to each actuator

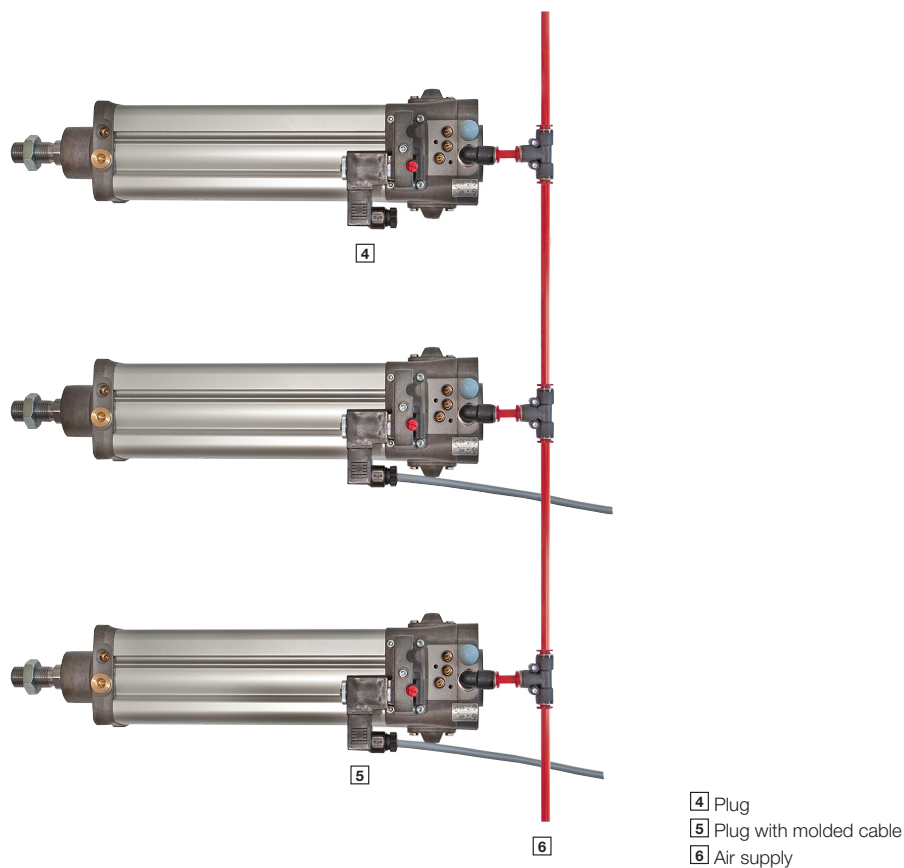

One of the advantages of the IVAC cylinders is to use the output ports (2 & 4) from the main valve to operate an additional cylinder.

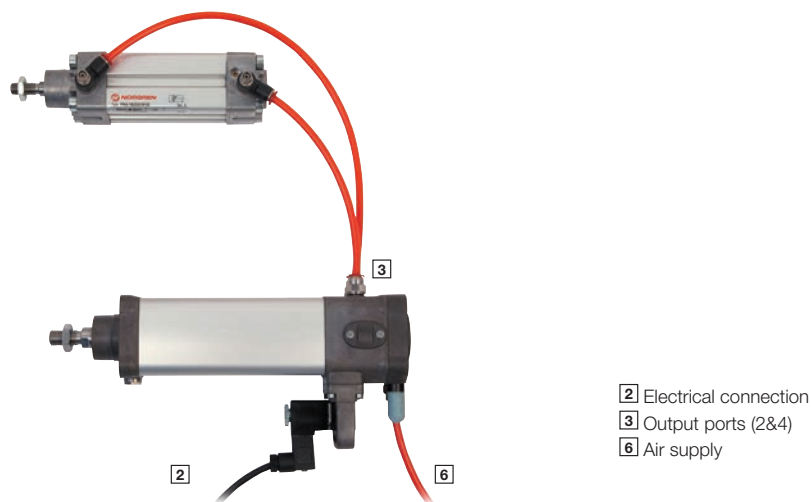

Mountings

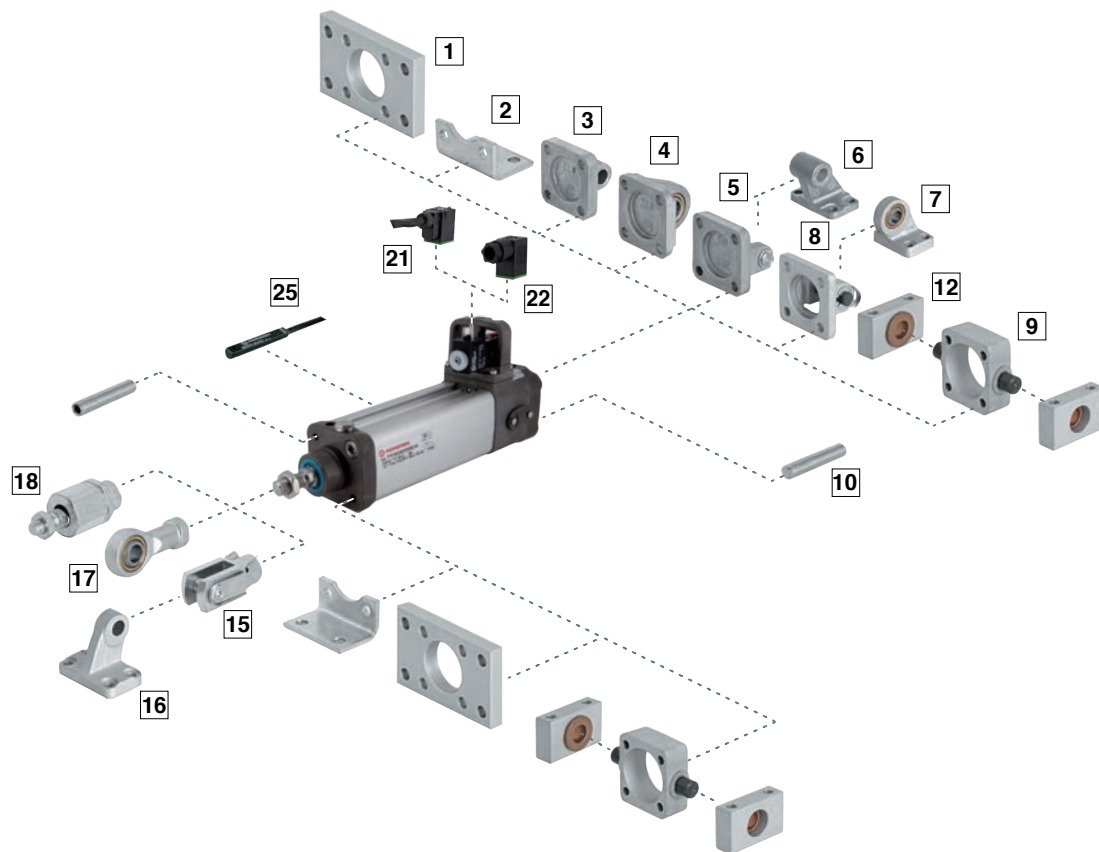


Position	Style	Standard	Corrosion protected
1	B, G	Clear anodised aluminium	Clear anodised aluminium. Screws: A2
2	C	Galvanized steel (ø 32 ... 63 mm) Painted steel (ø 80 & 100 mm)	—
3	R	Diecast aluminium	Black corrosion protected diecast aluminium. Certified for the food industry. Screws: A2
4	UR	Galvanized aluminium Inner ring: steel Outer ring: brass	Black corrosion protected diecast aluminium Certified for the food industry Inner ring: stainless Steel (austenitic) Outer ring: nickel plated hardened steel
5	D	Diecast aluminium Bolt: galvanized steel (martensitic) Circlip: galvanized steel	Black corrosion protected diecast aluminium Certified for the food industry Bolt: X 10 Cr Ni S 18 9 (1.4305, AISI 303) Circlip: Stainless steel (martensitic). Screws: A2
6	SW	Diecast aluminium	Black corrosion protected diecast aluminium Certified for the food industry
7	US	Galvanized aluminium. Inner ring: steel Outer ring: brass	—
8	D2	Painted cast iron. Bolt: stainless steel (martensitic) Circlip: galvanized steel	—
9	FH	Cast iron	—
10	A	Galvanized steel	—
11	Screw	—	—
12	S	Clear anodised aluminium Bearing: brass	—
15	F	Galvanized steel Bolt: galvanized steel Circlip: Galvanized steel	Nickel plated steel Circlip: X 10 Cr Ni S 18 9 (1.4305, AISI 303) Bolt: X 10 Cr Ni S 18 9 (1.4305, AISI 303)
16	SS	Painted cast iron	—
17	UF	Galvanized steel. Inner ring: steel Outer ring: brass	Nickel plated steel. Inner ring: stainless steel (austenitic) Outer ring: nickel plated hardened steel.
18	AK	Galvanized steel	—

Mountings

Model	A	AK	B, G	C	D	D2	F	FH
								
Cyl. Ø	10 Page 9	18 Page 9	1 Page 9	2 Page 9	5 Page 9	8 Page 9	15 Page 10	9 Page 10
32	QM/8032/35	QM/8025/38	QA/8032/22	QA/8032/21	QA/8032/23	QA/8032/42	QM/8025/25	QA/8032/34
40	QM/8032/35	QM/8040/38	QA/8040/22	QA/8040/21	QA/8040/23	QA/8040/42	QM/8040/25	QA/8040/34
50	QM/8050/35	QM/8050/38	QA/8050/22	QA/8050/21	QA/8050/23	QA/8050/42	QM/8050/25	QA/8050/34
63	QM/8050/35	QM/8050/38	QA/8063/22	QA/8063/21	QA/8063/23	QA/8063/42	QM/8050/25	QA/8063/34
80	QM/8080/35	QM/8080/38	QA/8080/22	QA/8080/21	QA/8080/23	QA/8080/42	QM/8080/25	QA/8080/34
100	QM/8080/35	QM/8080/38	QA/8100/22	QA/8100/21	QA/8100/23	QA/8100/42	QM/8080/25	QA/8100/34
Corrosion protected								
32	—	—	PVQA/8032/22	—	PVQA/8032/23	—	PVQM/8025/25	—
40	—	—	PVQA/8040/22	—	PVQA/8040/23	—	PVQM/8040/25	—
50	—	—	PVQA/8050/22	—	PVQA/8050/23	—	PVQM/8050/25	—
63	—	—	PVQA/8063/22	—	PVQA/8063/23	—	PVQM/8050/25	—
80	—	—	PVQA/8080/22	—	PVQA/8080/23	—	PVQM/8080/25	—
100	—	—	PVQA/8100/22	—	PVQA/8100/23	—	PVQM/8080/25	—
	R	S	SS	SW	UF	UR	US	
								
Cyl. Ø	3 Page 10	12 Page 10	16 Page 11	6 Page 11	17 Page 10	4 Page 11	7 Page 12	
32	QA/8032/27	QA/8032/41	M/P19931	M/P19493	QM/8025/32	QA/8032/33	M/P40310	
40	QA/8040/27	QA/8040/41	M/P19932	M/P19494	QM/8040/32	QA/8040/33	M/P40311	
50	QA/8050/27	QA/8040/41	M/P19933	M/P19495	QM/8050/32	QA/8050/33	M/P40312	
63	QA/8063/27	QA/8063/41	M/P19934	M/P19496	QM/8050/32	QA/8063/33	M/P40313	
80	QA/8080/27	QA/8063/41	M/P19935	M/P19497	QM/8080/32	QA/8080/33	M/P40314	
100	QA/8100/27	QA/8100/41	M/P19936	M/P19498	QM/8080/32	QA/8100/33	M/P40315	
Corrosion protected								
32	PVQA/8032/27	—	—	M/P40459	PVQM/8025/32	PVQA/8032/33	—	
40	PVQA/8040/27	—	—	M/P40460	PVQM/8040/32	PVQA/8040/33	—	
50	PVQA/8050/27	—	—	M/P40461	PVQM/8050/32	PVQA/8050/33	—	
63	PVQA/8063/27	—	—	M/P40462	PVQM/8050/32	PVQA/8063/33	—	
80	PVQA/8080/27	—	—	M/P40463	PVQM/8080/32	PVQA/8080/33	—	
100	PVQA/8100/27	—	—	M/P40464	PVQM/8080/32	PVQA/8100/33	—	

Connectors

Plug with cable gland	Plug with molded cable	Magnetically operated switches
		
21	22	25 Pages 12 & 13
V10027-D00	V10014-D01 (LED and VDR, cable length 1 m)	
V10012-D13 (LED and VDR)	V10014-D03 (LED and varistor, cable length 3 m)	

Service kit


	Service kit
	
Cyl. Ø	
32	PRQA/862032/00
40	PRQA/862040/00
50	PRQA/862050/00
63	PRQA/862063/00
80	PRQA/862080/00
100	PRQA/862100/00

Dimensions in mm
Projection/First angle



P.A/862000/MG./213A/.; Cylinder with piston rod bellow

Dimensions in mm
Projection/First angle

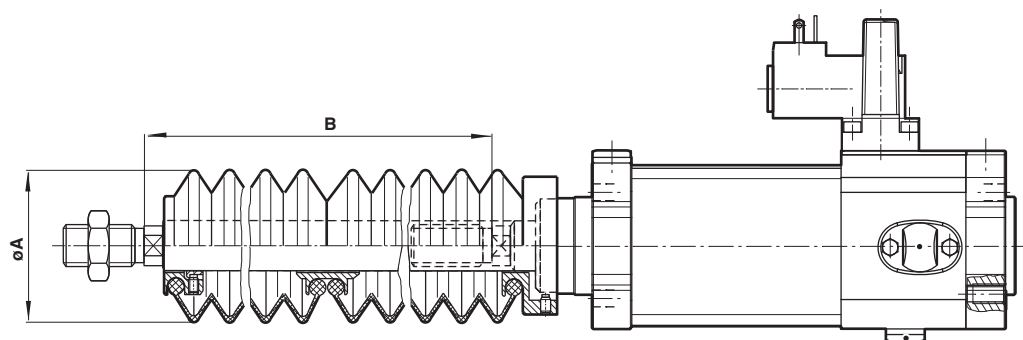

Cyl. Ø	Ø A	Stroke max per bellow	Piston rod extention B		Model
			for first bellow	for further bellows	
32	40	60	30	25	P#A/862032/MG+/213A/*
40	63	145	50	32	P#A/862040/MG+/213A/*
50	63	145	40	32	P#A/862050/MG+/213A/*
63	63	145	40	32	P#A/862063/MG+/213A/*
80	80	250	50	45	P#A/862080/MG+/213A/*
100	80	250	50	45	P#A/862100/MG+/213A/*

* Standard stroke length


Piston rod material

+ Valve function

Mountings

Front or rear stud mounting A

Conforms to ISO 15552, type MX1

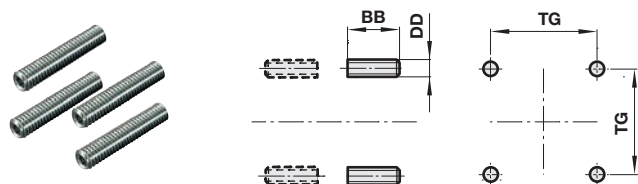


Standard

Ø	BB	DD	TG	kg	Model (A)
32/40	17	M6	32,5/38	0,02	QM/8032/35
50/63	23	M8	46,5/56,5	0,05	QM/8050/35
80/100	28	M10	72/89	0,08	QM/8080/35

Piston rod swivel AK

Dimensions in mm
 Projection/First angle

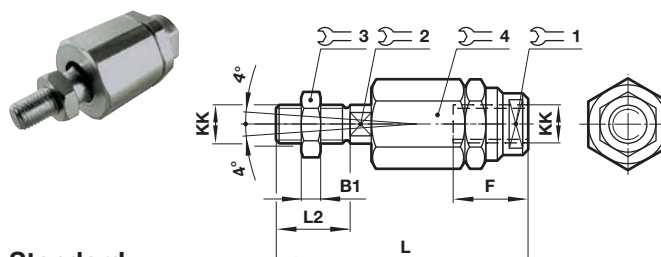


Standard

Ø	KK	B1	F	L	L2	1	2	3	4	kg	Model (AK)
32	M10x1,25	5	26	73	20	19	12	17	30	0,20	QM/8025/38
40	M12x1,25	6	26	77	24	19	12	19	30	0,20	QM/8040/38
50/63	M16x1,5	8	34	106	32	30	19	24	42	0,65	QM/8050/38
80/100	M20x1,5	10	42	122	40	30	19	30	42	0,72	QM/8080/38

Front flange B, G

Conforms to ISO 15552, type MF1 and MF2

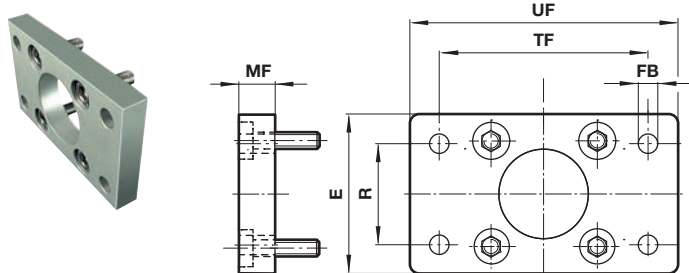

Standard


Ø	E	Ø FB	MF	R	TF	UF	kg	Model (B, G)
32	50	7	10	32	64	80	0,25	QA/8032/22
40	55	9	10	36	72	90	0,35	QA/8040/22
50	65	9	12	45	90	110	0,70	QA/8050/22
63	75	9	12	50	100	125	0,80	QA/8063/22
80	100	12	16	63	126	154	1,35	QA/8080/22
100	120	14	16	75	150	186	2,20	QA/8100/22

Corrosion protected version

Ø	E	Ø FB	MF	R	TF	UF	kg	Model (B, G)
32	50	7	10	32	64	80	0,25	PVQA/8032/22
40	55	9	10	36	72	90	0,35	PVQA/8040/22
50	65	9	12	45	90	110	0,7	PVQA/8050/22
63	75	9	12	50	100	125	0,8	PVQA/8063/22
80	100	12	16	63	126	154	1,35	PVQA/8080/22
100	120	14	16	75	150	186	2,2	PVQA/8100/22


Foot mounting C

Conforms to ISO 15552, type MS1

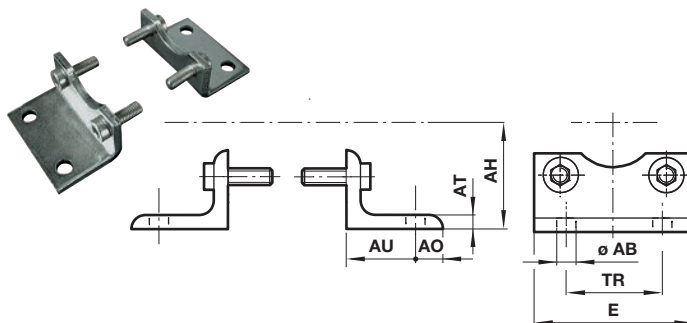


Standard

Ø	Ø AB	AH	AO	AT	AU	E	TR	kg	Model (C)
32	7	32	8	4	24	48	32	0,15	QA/8032/21
40	10	36	9	4	28	53	36	0,18	QA/8040/21
50	10	45	10	5	32	64	45	0,30	QA/8050/21
63	10	50	12	5	32	74	50	0,39	QA/8063/21
80	12	63	19	5	41	98	63	0,80	QA/8080/21
100	14	71	19	5	41	115	75	0,95	QA/8100/21

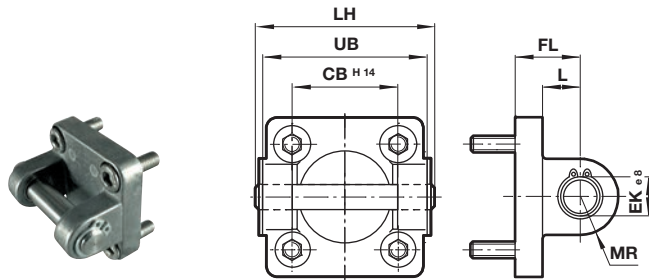
Rear clevis D
Conforms to ISO 15552, type MP2

Standard

Ø	CB H14	Ø EK e8	FL	L	LH	MR	UB	kg	Model (D)
32	26	10	22	13	52	9	45	0,11	QA/8032/23
40	28	12	25	16	60	12	52	0,16	QA/8040/23
50	32	12	27	17	68	12	60	0,22	QA/8050/23
63	40	16	32	22	79	15	70	0,34	QA/8063/23
80	50	16	36	22	99	15	90	0,54	QA/8080/23
100	60	20	41	27	119	20	110	0,90	QA/8100/23
Corrosion protected version									
32	26	10	22	13	52	9	45	0,11	PVQA/8032/23
40	28	12	25	16	60	12	52	0,16	PVQA/8040/23
50	32	12	27	17	68	12	60	0,22	PVQA/8050/23
63	40	16	32	22	79	15	70	0,34	PVQA/8063/23
80	50	16	36	22	99	15	90	0,54	PVQA/8080/23
100	60	20	41	27	119	20	110	0,9	PVQA/8100/23

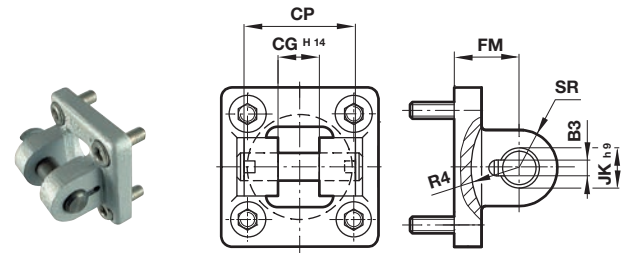
Rear clevis D2
Conforms to ISO 15552, type AB6

 Dimensions in mm
Projection/First angle

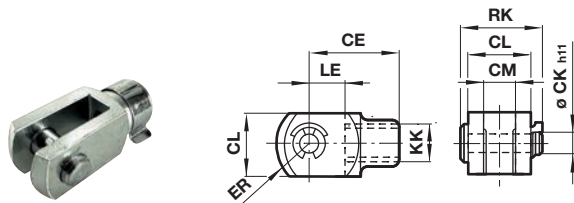Standard

Ø	B1 H14	B2	B3	Ø EK h9	FL	R1	R2	kg	Model (D2)
32	14	34	3,3	10	22	11	17	0,20	QA/8032/42
40	16	40	4,3	12	25	12	20	0,23	QA/8040/42
50	21	45	4,3	16	27	14,5	22	0,36	QA/8050/42
63	21	51	4,3	16	32	18	25	0,55	QA/8063/42
80	25	65	4,3	20	36	22	30	0,90	QA/8080/42
100	25	75	4,3	20	41	22	32	1,45	QA/8100/42

Piston rod clevis F
Conforms to DIN ISO 8140

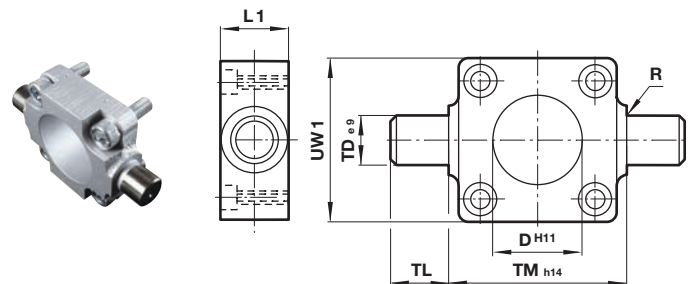Standard


Ø	KK	CE	Ø CK h11	CL	CM	ER	LE	RK	kg	Model (F)
32	M10x1,25	40	10	20	10	16	20	28	0,09	QM/8025/25
40	M12x1,25	48	12	24	12	19	24	32	0,13	QM/8040/25
50/63	M16x1,5	64	16	32	16	25	32	41,5	0,33	QM/8050/25
80/100	M20x1,5	80	20	40	20	32	40	50	0,67	QM/8080/25
Corrosion protected version										
32	M10x1,25	40	10	20	10	16	20	28	0,09	PVQM/8032/25
40	M12x1,25	48	12	24	12	19	24	32	0,13	PVQM/8040/25
50/63	M16x1,5	64	16	32	16	25	32	41,5	0,33	PVQM/8050/25
80/100	M20x1,5	80	20	40	20	32	40	50	0,67	PVQM/8080/25

Front or rear detachable trunnion FH
**Conforms to VDMA 24562 part 2,
type MT 5/6**

Standard

Ø	Ø D h11	L1	R	Ø TD e9	TL	TM h14	UW1	kg	Model (FH)
32	30	16	1	12	12	50	45	0,20	QA/8032/34
40	35	20	1,6	16	16	63	55	0,38	QA/8040/34
50	40	24	1,6	16	16	75	65	0,60	QA/8050/34
63	45	24	1,6	20	20	90	75	1,10	QA/8063/34
80	45	28	1,6	20	20	110	100	1,90	QA/8080/34
100	55	38	2	25	25	132	120	3,50	QA/8100/34

Rear eye R

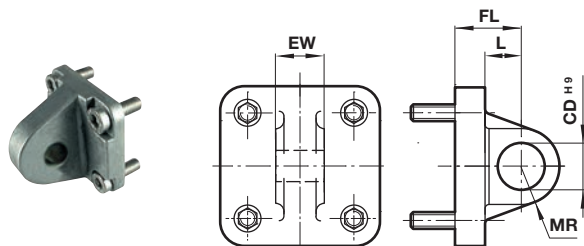Conforms to ISO 15552, type MP4




Standard

Ø	Ø CD H9	EW	FL	L	MR	kg	Model (R)
32	10	25,8	22	13	9	0,09	QA/8032/27
40	12	27,8	25	16	12	0,11	QA/8040/27
50	12	31,7	27	17	12	0,17	QA/8050/27
63	16	39,7	32	22	15	0,24	QA/8063/27
80	16	49,7	36	22	15	0,37	QA/8080/27
100	20	59,7	41	27	20	0,59	QA/8100/27
Corrosion protected version							
32	10	25,8	22	13	9	0,09	PVQA/8032/27
40	12	27,8	25	16	12	0,11	PVQA/8040/27
50	12	31,7	27	17	12	0,17	PVQA/8050/27
63	16	39,7	32	22	15	0,24	PVQA/8063/27
80	16	49,7	36	22	15	0,37	PVQA/8080/27
100	20	59,7	41	27	20	0,59	PVQA/8100/27

Trunnion support S

Conforms to ISO 15552, type AT4

Dimensions in mm
Projection/First angle

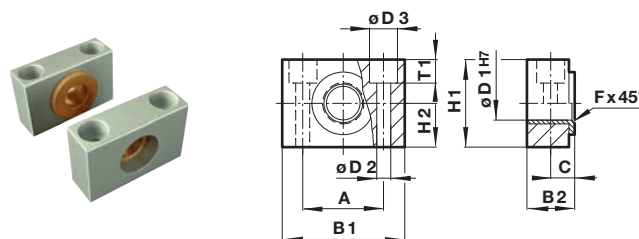


Standard

Ø	A	B	B2	C	Ø D1 H7	Ø D2	Ø D3	F x 45°	H	H1	H2	T1	T2	kg	Model (S)
32	32	46	18	10,5	12	6,6	11	1	30	15	6,8	0,10		0,10	QA/8032/41
40/50	36	55	21	12	16	9	15	1,6	36	18	9	0,14		0,14	QA/8040/41
63/80	42	65	23	13	20	11	18	1,6	40	20	11	0,18		0,18	QA/8063/41
100	50	75	28,5	16	25	14	20	2	50	25	13	0,34		0,34	QA/8100/41

Universal piston rod eye UF

Conforms to DIN ISO 8139

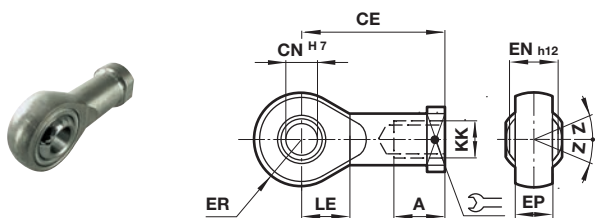


Standard

Ø	Thread KK	AX	CE	Ø CN H7	EN -0,1	ER	LE	Z	kg	Model (UF)
32	M10x1,25	20	43	10	14	14	15	13°	0,09	QM/8025/32
40	M12x1,25	22	50	12	16	16	17	13°	0,13	QM/8040/32
50/63	M16x1,5	28	64	16	21	21	22	15°	0,33	QM/8050/32
80/100	M20x1,5	33	77	20	25	25	26	15°	0,67	QM/8080/32
Corrosion protected version										
32	M10x1,25	20	43	10	14	14	15	13°	0,09	PVQM/8025/32
40	M12x1,25	22	50	12	16	16	17	13°	0,13	PVQM/8040/32
50/63	M16x1,5	28	64	16	21	21	22	15°	0,33	PVQM/8050/32
80/100	M20x1,5	33	77	20	25	25	26	15°	0,4	PVQM/8080/32


Wide hinge SW

Conforms to ISO 15552, type AB7

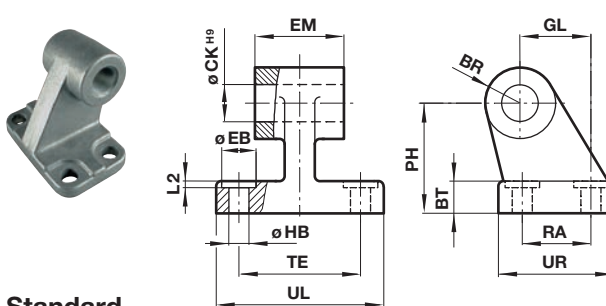


Standard

Ø	CA	Ø CK H9	Ø D	H	EM	G1	G2	G3	K1	K2	L	R	Ø S	kg	Model (SW)
32	32	10	11	7	25,5	21	18	31	38	50	1,6	10	6,6	0,05	M/P19493
40	36	12	11	9	27,5	24	22	35	41	54	1,6	11	6,6	0,07	M/P19494
50	45	12	15	11	31,5	33	30	45	50	65	1,6	13	9	0,14	M/P19495
63	50	16	15	12	39,5	37	35	50	52	67	1,6	15	9	0,18	M/P19496
80	63	16	18	14	49,5	47	40	60	66	84	2,5	15	11	0,28	M/P19497
100	71	20	18	15	59,5	55	50	70	76	94	2,5	19	11	0,42	M/P19498
Corrosion protected version															
32	32	10	11	8	26,5	21	18	31	38	51	1,6	10	6,6	0,05	M/P40459
40	36	12	11	10	28,5	24	22	35	41	54	1,6	11	6,6	0,07	M/P40460
50	45	12	15	12	32,5	33	30	45	50	65	1,6	13	9	0,14	M/P40461
63	50	16	15	12	40,5	37	35	50	52	67	1,6	15	9	0,18	M/P40462
80	63	16	18	14	50,5	47	40	60	66	86	2,5	15	11	0,28	M/P40463
100	71	20	18	15	60,5	55	50	70	76	96	2,5	19	11	0,42	M/P40464

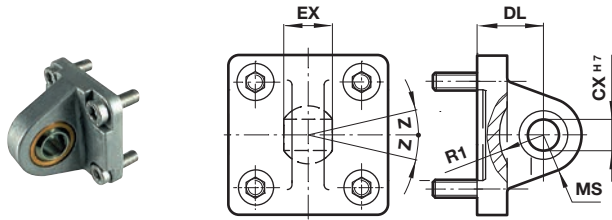
Universal rear eye UR
Conforms to ISO 15552, type MP6

Standard

Ø	Ø CN H7	EN	ER	FL	R	Z	kg	Model (UR)
32	10	14	16	22	14,5	13°	0,15	QA/8032/33
40	12	16	18	25	18	13°	0,25	QA/8040/33
50	16	21	21	27	19	15°	0,40	QA/8050/33
63	16	21	23	32	24	15°	0,55	QA/8063/33
80	20	25	28	36	24	15°	0,90	QA/8080/33
100	20	25	30	41	29	15°	1,50	QA/8100/33
Corrosion protected version								
32	10	14	16	22	14,5	13°	0,15	PVQA/8032/33
40	12	16	19	25	18	13°	0,25	PVQA/8040/33
50	16	21	21	27	19	13°	0,4	PVQA/8050/33
63	16	21	24	32	24	15°	0,55	PVQA/8063/33
80	20	25	28	36	24	15°	0,9	PVQA/8080/33
100	20	25	30	41	29	15°	1,5	PVQA/8100/33

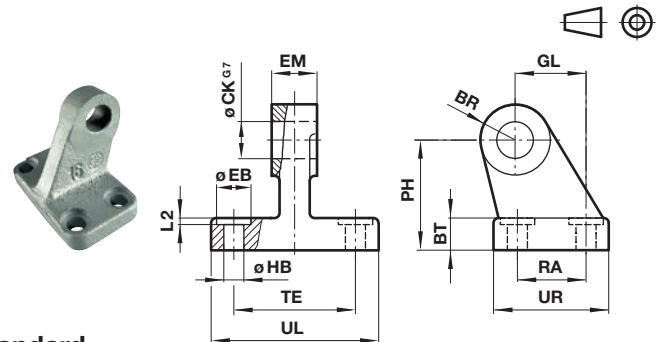Narrow hinge SS




 Dimensions in mm
 Projection/First angle

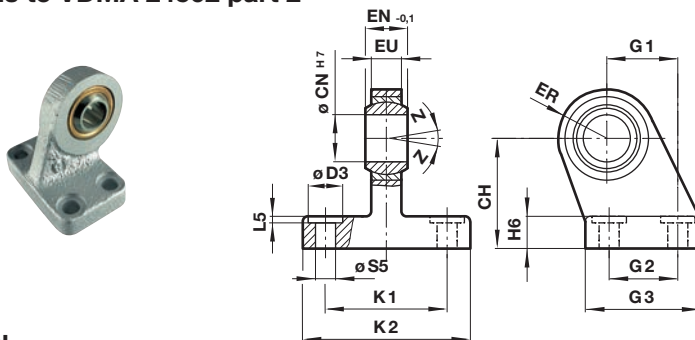Standard

Ø	CA	Ø CN G7	Ø D	H 2	EM	G 1	G 2	G 3	K 1	K 2	L 1	R	Ø S	kg	Model (SS)
32	32	10	11	8	10	21	18	31	38	51	1,6	10	6,6	0,15	M/P19931
40	36	12	11	10	12	24	22	35	41	54	1,6	11	6,6	0,20	M/P19932
50	45	16	15	12	16	33	30	45	50	65	1,6	13	9	0,48	M/P19933
63	50	16	15	12	16	37	35	50	52	67	1,6	15	9	0,50	M/P19934
80	63	20	18	14	20	47	40	60	66	86	2,5	15	11	0,75	M/P19935
100	71	20	18	15	20	55	50	70	76	96	2,5	19	11	1,20	M/P19936

Swivel hinge US
Conforms to VDMA 24562 part 2

Standard

Ø	CH	Ø CN H7	Ø D	EN -0,1	ER	EU	G1	G2	G3	H2	K1	K2	L1	Ø S	Z	kg	Model (US)
32	32	10	11	14	16	10,5	21	18	31	10	38	51	1,6	6,6	13°	0,19	M/P40310
40	36	12	11	16	18	12	24	22	35	10	41	54	1,6	6,6	13°	0,24	M/P40311
50	45	16	15	21	21	15	33	30	45	12	50	65	1,6	9	13°	0,46	M/P40312
63	50	16	15	21	23	15	37	35	50	12	52	67	1,6	9	15°	0,59	M/P40313
80	63	20	18	25	28	18	47	40	60	14	66	86	2,5	11	15°	1,03	M/P40314
100	71	20	18	25	30	18	55	50	70	15	76	96	2,5	11	15°	1,40	M/P40315

Technical data - Reed switches - additional informations see data sheet N/en 4.3.005

Symbol	Voltage		Current maximum	Function	Temperature	LED	Protection class	Plug	Cable length	Cable type	Weight	Model
	(V a.c.)	(V d.c.)	(mA)		(°C)				(m)		(g)	
	10 ... 240	10 ... 170	180	Closer	-25 ... +80	•	IP66	—	2, 5 or 10	PVC 2 x 0,25	37	M/50/LSU/*V
	10 ... 240	10 ... 170	180	Closer	-25 ... +80	•	IP66	—	5	PUR 2 x 0,25	37	M/50/LSU/5U
	10 ... 240	10 ... 170	180	Closer	-25 ... +150	—	IP66	—	2	Silicon 2 x 0,25	37	TM/50/RAU/2S
	10 ... 240	10 ... 170	180	Changeover	-25 ... +80	—	IP66	—	5	PVC 3 x 0,25	37	M/50/RAC/5V
	10 ... 60	10 ... 60	180	Closer	-25 ... +80	•	IP66	M8 x 1	0,3	PVC 3 x 0,25	16	M/50/LSU/CP *1)

* Insert cable length; *1) Plug-in connector see page 11; Color code: BK = black, BN = brown, BU = blue

Drawings




M/50/LSU/*V, M/50/LSU/5U,
 TM/50/RAU/2S
 Cable length L = 2, 5 or 10 m



M/50/RAC/5V
 Cable length L = 5 m



M/50/LSU/CP

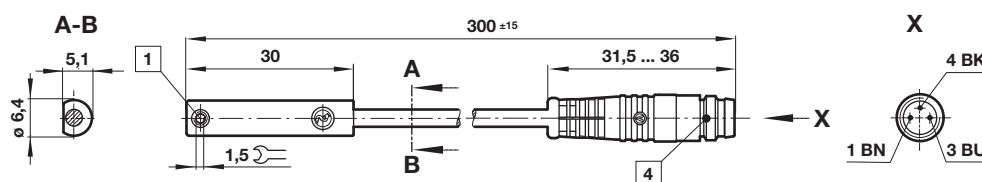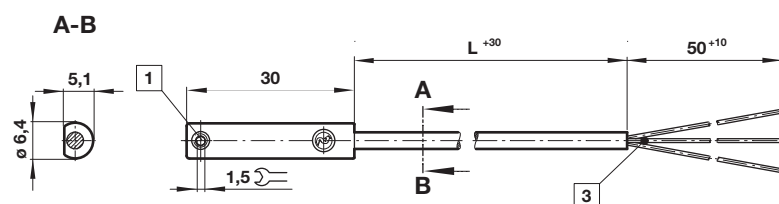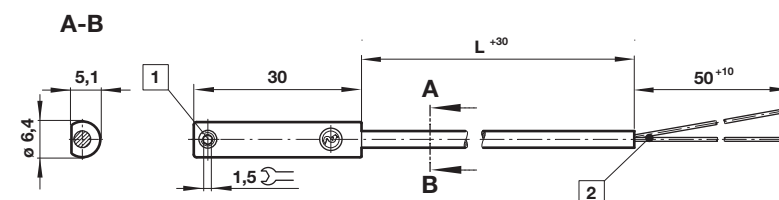

- 1 Fixing screw
- 2 + BN = brown; - BU = blue (output)
- 3 - BK = black; + BN = brown; - BU = blue
- 4 Plug M8 x 1, color code: BK = black; BN = brown; BU = blue





Accessories

Plug-in connector cable with nut



Outer cover	Cable length (m)	Weight (kg)	Connector	Connector
PVC 3 x 0,25	5 m	0,18	M8 x 1	M/P73001/5
PUR 3 x 0,25	5 m	0,18	M8 x 1	M/P73002/5
PUR 3 x 0,34	5 m	0,21	M12 x 1	M/P34594/5

Technical data - Solid state - additional informations see data sheet N/en 4.3.007

Symbol	Voltage (V d.c.)	Current maximum (mA)	Function	Temperature (°C)	LED	Protection class	Plug	Cable length (m)	Cable type	Weight (g)	Model
	10 ... 30	150	PNP	-40 ... +80	•	IP67	—	2, 5 or 10	PVC 3 x 0,12	37	M/50/EAP/*V
	10 ... 30	150	PNP	-40 ... +80	•	IP68	—	5	PUR 3 x 0,14	37	M/50/EAP/5U
	10 ... 30	150	NPN	-40 ... +80	•	IP67	—	2, 5 or 10	PVC 3 x 0,12	37	M/50/EAN/*V
	10 ... 30	150	Closer	-40 ... +80	•	IP67	M8 x 1	0,3	PVC 3 x 0,14	16	M/50/EAN/CP *1)

* Insert cable length; *1) Plug-in connector below; Color code: BK = black, BN = brown, BU = blue

Drawings




M/50/EAP/*V,
M/50/EAN/*V
Cable length L = 2, 5 or 10 m



M/50/EAP/CP,
M/50/EAN/CP



M/50/EAP/CC

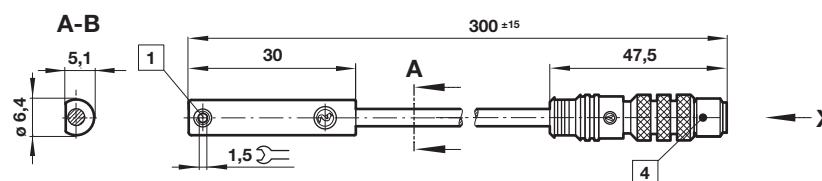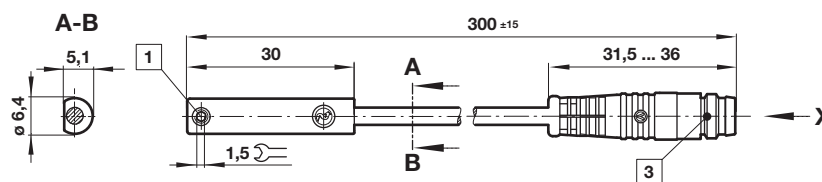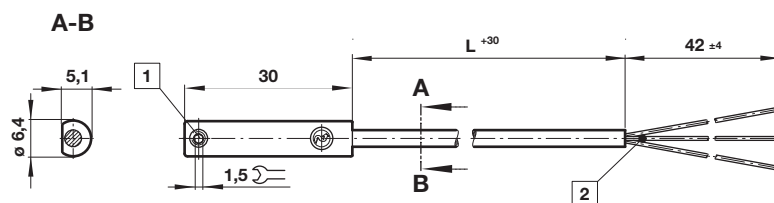

- 1 Fixing screw
- 2 Color code: BK = black; BN = brown; BU = blue
- 3 Plug M8 x 1
- 4 Plug M12 x 1

Dimensions in mm
Projection/First angle


Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under

»Technical features/data«.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult IMI Precision Engineering, Norgren GmbH.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Саранск (8342)22-96-24
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97

Тверь (4822)63-31-35
Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

www.norgren.nt-rt.ru | | ner@nt-rt.ru